

24V TRULUX RGB Tape Light

PROJECT:	TYPE:
LOCATION:	CAT:



Description

Economical and versatile tape light with RGB capable light output and run lengths up to 22ft

Features

- Unjacketed (IP54) rating
- Linking accessories, controllers, receivers, power supplies, and extrusions are available for Trulux tape light (sold separately)

Mounting

Surface mount via attached 3M adhesive tape, mounting clips, or aluminum extrusions (sold separately)

Applications



Task or accent lighting, edge lighting, cabinetry, shelving, coves, staircases, toe kicks, railings, display cases

Technical Information




IP Rating	IP54
Voltage	24V DC
CCT	3-in-1 RGB
CRI	N/A
Wattage	4.6W/ft
Lumens	165Lm/ft
Max Run	22ft
Cutting	3.94"
Dimming	Trulux controllers or DMX control
LED	RGB LEDs spaced every 0.64"
Beam	120°
Operating Temp	5°C (41°F) to 70°C (158°F)
Ambient Temp	-20°C (-4°F) to 40°C (104°F)
Rating	cULus Listed, dry location
Rated Life	50,000 Hours

Dimensions: IP54 Unacketed

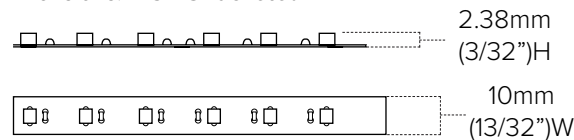

When using standard snap connectors, it is recommended to scrape off the coating from each conductor to ensure a proper connection. When using heavy duty snap connectors, this is only necessary for IP65 and IP68 types.


BASIC TRULUX CONTROL SYSTEM



Trulux Controller









LED-DR 24V Driver
(30W, 60W, 100W, 150W)



Trulux RF or DMX Receiver
(Required)

Trulux RGB Control Options

Image	Part Number	Description
Trulux Controllers		
	RF-RGBW-3Z	Trulux RGB+WW Radio Frequency Control; Touch Slide Wall Mount; 1-3 zones; 12V/24V DC input; Requires the use of a Trulux Radio Frequency receiver
	RF-RGBW-3AAA	Trulux Single Color Radio Frequency Control; Handheld Remote; 1-8 zones; Battery operated (3xAAA not included); Requires the use of a Trulux Radio Frequency receiver
	RF-RGBW-USB	Trulux Single Color Radio Frequency Control; Handheld Remote; 1-8 zones; Battery operated (USB Rechargeable); Requires the use of a Trulux Radio Frequency receiver
	Trulux App	Trulux Mobile Application; Mobile Phone or Tablet ready, interactive dial controls; Available on Google Play or the App Store; Requires the TruHub (RF-WiFi-8) router and receivers (REC-5A-4Z) for 2-8 zones or the RF + WiFi receiver (REC-5A-4Z-WiFi) for single zone applications
	DMX-2-2	Trulux RGB DMX Control; Touch Slide Wall Mount; 12V/24V DC input; 2+2 zones; Requires the use of a Trulux DMX receiver
	DMX-3Z	Trulux RGB DMX Control; Touch Slide Wall Mount; 12V/24V DC input; 1-3 zones; Requires the use of a Trulux DMX receiver
Trulux Receivers		
	REC-5A-4Z	Trulux Radio Frequency Receiver; Sync multiple receivers to a single control; 4 x (60-180W) 5A per channel; 12V/24V DC input; For use with Trulux Radio Frequency control or Trulux TruHub plus Trulux App
	REC-5A-4Z-WIFI	Trulux Radio Frequency + WiFi Receiver; Sync multiple receivers to a single control; 4 x (60-180W) 5A per channel; 12V/24V DC input; For use with Trulux Radio Frequency Control or Trulux App
	WIFI-RF-8	TruHub WiFi Hub Control; converts WiFi to RF for 2-8 zones; For use with REC-5A-4Z and Trulux App
	REC-DMX-5A-4Z-PLUS	Trulux DMX Plus Receiver; 12V/24V DC input; Manual/Auto presets; 1-4 outputs; For use with Trulux DMX Control
	REC-DMX-5A-4Z	Trulux DMX Receiver; 12V/24V DC input; 1-4 outputs; For use with Trulux DMX Control

Recommended Power Supplies

Part Number	Description	Application	Primary / Secondary	Total Wattage	Listing	Dimensions
For Trulux Controlled Systems						
LED-DR30-24	Constant voltage hardwire driver	Dry location	100-240 AC / 24V DC	30W	cURus	6-1/2"x1-3/4"x1-3/16"
LED-DR60-24	Constant voltage hardwire driver	Dry/Damp location	100-240 AC / 24V DC	60W	cURus	7-13/16"x1-3/4"x1-5/8"
LED-DR100-24	Constant voltage hardwire driver	Dry/Wet location	100-240 AC / 24V DC	100W	cURus	7-5/8"x2-1/8"x1-1/2"
LED-DR150-24	Constant voltage hardwire driver	Dry/Wet location	100-240 AC / 24V DC	150W	cURus	9"x2-5/8"x1-1/2"
For Non-Trulux Controlled Systems						
ELV-30-24	Constant voltage hardwire driver	Dry location	100-130V AC / 24V DC	30W	cETLus	7-1/16"x2-3/8"x1-3/8"
ELV-45-24	Constant voltage hardwire driver	Dry location	100-130V AC / 24V DC	45W	cETLus	7-1/16"x2-3/8"x1-3/8"
ELV-60J-24	Constant voltage hardwire driver	Wet location	100-130V AC / 24V DC	60W	cETLus	13-3/4"x3-1/16"x2-5/16"
ELV-80J-24	Constant voltage hardwire driver	Wet location	100-130V AC / 24V DC	80W	cETLus	13-3/4"x3-1/16"x2-5/16"

ELV Drivers require 60% minimum load in dimming applications

Ordering Information

24V 16.4ft Reels HTL-RGB Series

TAPE LIGHT TYPE CCT

HTL

 -

RGB

HTL = IP54 High Output
HTL65 = IP68 High Output RGB = RGB

24V 16.4ft Kits HTL-RGB Series

TAPE LIGHT TYPE CCT LENGTH

HTL

 -

RGB

 -

5MKIT

HTL = IP54 High Output RGB = RGB 5MKIT = 16.4ft Kit

HTL-RGB (IP54) 16.4ft Reels include:
Attached 3ft lear wire
(3) TL-4PWR power connectors

HTL-RGB (IP54) 16.4ft Kits include:
(1) - 24V 3A Plug-in Driver
(1) - Handheld Remote with In-Line RF Receiver
(1) - Power Supply Connections
(1) - 15ft Spool of 20AWG Wire
(1) - 16.4ft (5M) High Output RGB Tape Light
(3) - Tape-to-Tape Snap Connectors
(6) - Tape-to-Wire Snap Connectors

Example Part # **HTL-RGB**




HTL

 -

RGB

Trulux RGB is also available in Custom Cut (special order) lengths.

Connection Accessories

Image	Part Number	Description
	TL-4PWR	IP54 Power feed snap connector to bare wires (4-wire)
	TL-4JUMP-5	6" IP54 Tape-to-tape snap jumper (5-wire)
	TL-4JUMP-1	12" IP54 Tape-to-tape snap jumper (5-wire)
	TL-4JUMP-2	24" IP54 Tape-to-tape snap jumper (5-wire)
	TL-4SPL	IP54 In-line splice snap connector (5-wire)
	TL-4L	IP54 "L" snap connector (4-wire)
	TL-4T	IP54 "T" snap connector (4-wire)
	TL-4X	IP54 "X" snap connector (4-wire)

NOTES
