



The GREEN CREATIVE Team thanks you for choosing this energy efficient product. All of our lamps and fixtures feature the latest in LED technology and will provide you with high-quality lighting and great savings. We hope you enjoy your new light.

GREEN CREATIVE LLC LIMITED WARRANTY POLICY

GREEN CREATIVE (the "Seller") warrants that its lamps and fixtures listed below (the "Product") are, at the time of delivery to the Buyer, in good working order and free from defects in material and workmanship.

If a Product fails to conform with this limited Warranty for the specified period below, Seller will at its sole option, either (i) repair the Product at no charge, or (ii) replace the Product at no charge or (iii) provide Buyer a credit for a future Product purchase calculated as follows: (Invoice price of the Product (\$) x undelivered Warranty period (operating hours) / intended Warranty period (operating hours))

Product Type	Warranty Period
PAR38, PAR30, PAR20, BR30 (CRI90+ only), A-Type (CRI 90+ only), SMDL, DL, PL, T8	5 years from date of purchase or 26,280 hours of operation over 36 months or 21,900 hours of operation over 60 months, whichever occurs first

Product Type	Warranty Period
PAR16, MR16, MR11, BR40, BR30, R20, A-type, B-type, GU10, G-type	3 years from date of purchase or 13,140 hours of operation over 18 months or 13,140 hours of operation over 36 months, whichever occurs first

This limited Warranty only applies to Products registered with the Seller as part of an installation project within thirty (30) days from date of purchase. For product registration fill in the form available at: <http://www.greencreative.com/about/warranty-terms> and submit it by email to: warranty@greencreative.com or by fax to: (866) 774-5433 or mail to: 220 South Spruce Ave., Suite 203 South San Francisco, CA 94080

Replacement of the Product does not include any removal or reinstallation costs or expenses, including without limitation labor cost or expenses, shipping costs to return non-conforming Products or any damage that may occur during the return of the Product to the Seller. If Seller chooses to replace the Product and is not able to do so because such Product has been discontinued or is not available, Seller may replace it with a product of comparable functionality.

This limited Warranty is subject to the following additional conditions:

- 1) The Product has not been subject to abuse, mishandling, alteration, accident, electrical current fluctuations, acts of gods, neglect, failure to follow operating, maintenance or environmental instructions prescribed by Seller in writing or services performed by someone other than Seller or its duly authorized service provider in writing.
- 2) Adequate Product operating records are kept and made available to the Seller if requested.
- 3) A Seller representative has access to the Product installation and the fixture used to operate it.
- 4) Product has been purchased directly through Seller's authorized distributor or dealer.
- 5) Product has been purchased and used in regions that are within jurisdiction of the United States and Canada.
- 6) Returned Product includes Return Goods Authorization (RGA) and original proof of purchase.

Replacement Product or parts provided under the terms of this warranty are warranted for the remainder of the warranty period of the original Product or original parts they replace. LIMITED WARRANTY IS VOID IF THE PRODUCT IS NOT USED FOR THE PURPOSE FOR WHICH THE PRODUCT IS MANUFACTURED. This warranty applies only to Products that are operated within Seller specifications and operated in lighting equipment designed and approved for the application and in environmental conditions (temperature, humidity and air movement) within the normal specified operating range of the system. Warranty is not applied for any Product, which are used in violation of any standard, code or instructions for use.

EXCEPT FOR THE EXPRESSED WARRANTY SET FORTH ABOVE, SELLER PROVIDES PRODUCTS AS-IS AND MAKES NO OTHER REPRESENTATIONS OR WARRANTIES, EXPRESSED OR IMPLIED, STATUTORY OR OTHERWISE, REGARDING THE PRODUCTS, THEIR FITNESS FOR ANY PARTICULAR PURPOSE, THEIR MERCHANTABILITY, THEIR QUALITY, THEIR NONINFRINGEMENT, OR OTHERWISE. IN NO EVENT SHALL SELLER BE LIABLE FOR ANY SPECIAL, COMPENSATORY, INDIRECT, PUNITIVE, INCIDENTAL OR CONSEQUENTIAL DAMAGES INCLUDING BUT WITHOUT LIMITATION, DAMAGES RESULTING FROM LOSS OF USE, PROFITS, BUSINESS OR GOODWILL WHETHER NOT SELLER HAS BEEN ADVISED OF THE POSSIBILITY THEREOF. SELLER IS ONLY BOUND BY ABOVE EXPRESSED WARRANTY. NO OTHER EXPRESSED WARRANTY OR GUARANTEE GIVEN BY ANY PERSON OR ENTITY WITH RESPECT TO THE PRODUCT SHALL BIND SELLER.

CLICK DOWNLIGHT INSTALLATION GUIDE – WARNING

WARNING – Read all product labels and instructions before installing fixture.

WARNING – Risk of fire or electric shock. LED Retrofit Kit installation requires knowledge of luminaires electrical systems. Installation should be performed only by a qualified electrician in accordance with the National Electrical Code and relevant local code.

WARNING – Risk of fire or electric shock. Install this kit only in the luminaires that have the construction features and dimensions shown in the photographs and/or drawings.

WARNING – To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.


WARNING – Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING – The recessed luminaire is intended for mounting only in a covered ceiling where only the led side of the luminaire will be exposed to damp or dry locations.

WARNING – INSTALLATION SHOULD ONLY BE PERFORMED AFTER POWER TO THE FIXTURE HAS BEEN DISCONNECTED.

4" RECESSED INCANDESCENT HOUSING INSTALLATION

1. Make sure the POWER IS TURNED OFF at the source to the recessed housing in which you are installing the product.
2. Insert the wire ends of the E26 adapter into the LED adapter (fig. 1). Insert the black wire into the side marked (+) and the white wire into the side marked (-). Make sure both wires are tightly secured in the LED adapter.
3. Screw the E26 adapter into the socket (fig. 2).
4. Insert mounting clips into the downlight mounting bracket. (fig. 3).
5. Connect the end of the E26 adapter to the downlight (fig. 4).
6. Attach the provided green ground wire to inside of the housing using one of the following options (fig. 5): a) Fasten using existing screw inside housing b) Fasten using existing bolt inside housing and provided nut c) Fasten using provided ground screw and existing hole in housing.
7. Push downlight up into the housing (fig. 6). Carefully tuck all of the wire inside the housing and gently push the downlight up until flush with ceiling surface (fig. 7).

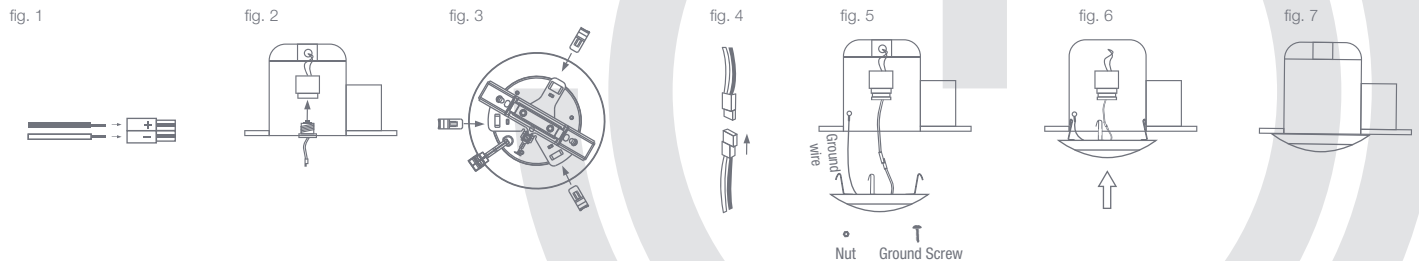

4" RECESSED LED HOUSING INSTALLATION

Follow installation steps above, omitting Steps 2-3. For Step 5, connect the end of the LED housing adapter to the downlight.

TITLE 24 INSTALLATION

For installation inside a Title 24 compliant housing with a GU24 line-voltage base, use the GU24 adapter (sold separately). Proceed to Step 3 of 4" RECESSED INCANDESCENT HOUSING INSTALLATION and substitute the E26 adapter with the GU24 adapter.


4" HOUSING COMPATIBILITY

Compatible with most standard 4" IC and Non-IC housings. Compatible with most recessed housing with an aperture measuring 4" and minimum height measuring 5.05". Not all existing housing meeting these requirements will be compatible. A test installation should always be performed.

4" J-BOX INSTALLATION

1. Make sure the POWER IS TURNED OFF at the source to the J-box in which you are installing the product.
2. Insert the existing wire ends from the J-box into the LED adapter (fig. 1). Insert the black wire into the side marked (+) and the white wire into the side marked (-). Make sure both wires are tightly secured in the LED adapter.*
3. Remove the mounting bracket from the back of the downlight and either cut the attached green ground wire as close to the mounting bracket's ground screw as possible or remove the wire entirely (fig. 2). Loosen the ground screw and wrap the existing ground wire from the J-box around it. Tighten until the ground wire is secure (fig. 3).
4. Attach the mounting bracket to the J-box using two of the provided screws (fig. 4). Note the mounting bracket's beveled side should be facing down once installed.
5. Connect the end of the LED adapter coming out of the J-box to the downlight (fig. 5).
6. Push downlight up into the mounting bracket until you hear it click into place (fig. 6). Make sure all wires are carefully tucked inside the J-box (fig. 7).

*If existing J-box wiring does not allow for the use of the LED adapter, remove the adapter from the downlight and wire directly to the J-box using the provided wire nuts.

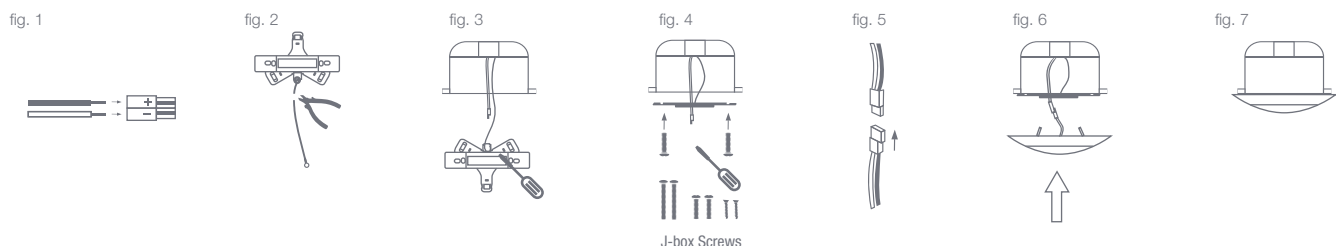

4" J-BOX COMPATIBILITY

Compatible with most standard 4" J-boxes with minimum height measuring 1.5". Not all existing J-boxes meeting these requirements will be compatible. A test installation should always be performed.