

Project Name:	Part Number:	Type:
---------------	--------------	-------

BOLLARDS - 15W LED

OUTDOOR LIGHTING



407-478-3759
www.ilp-inc.com

FEATURES

- Flat Top or Dome Top design with aluminum cone reflector
- 42" extruded aluminum housing with flush mounting base and vandal-resistant screws, optional cut down
- Powder coat finish over a chromate conversion coating, available in black or bronze
- Custom color options available¹
- Stainless Steel housing available for Domed Top only (SS)
- Internal ballast tray for easy maintenance
- Clear Polycarbonate Lens
- Multiple beam spread options: 90°, 180° & 270°
- 8" anchor bolts (std.), optional 4", 12" & 15"
- 120-277V Universal Voltage
- 5 Year Warranty
- ETL Listed for Wet Locations

¹Contact factory for pricing



REPLACES
320W MH



SUITABLE APPLICATIONS

- Walkways
- Boardwalks
- Parking Lots

LED SYSTEMS INFO	BLFT	BLDT
Calculated L ₇₀ (TM-21)	>50K	>50K
Delivered Lumens	1,402 lm	1,221 lm
Total Input Watts	17 W	16 W
Luminaire Efficacy Rating (LER)	83 lm/W	74 lm/W
Correlated Color Temperature (CCT)	4000K	4000K
Color Rendering Index (CRI)	>80	>80
Ambient Temperature Range	110°F	110°F
Universal Driver	120-277 V	120-277 V

LED System data above based on BLFT-15WLED-UNIV-4000K & BLDT-15WLED-UNIV-4000K.
LED Lumen maintenance estimates based on TM-21 projections for the light source at 25°C ambient.


ORDERING GUIDE:

Series	Watts	Driver	Color	Options
BLFT Flat Top Bollard	15WLED	UNIV 120-277V Driver	4000K	RPL Replacement Polycarbonate Lens
BLDT Dome Top Bollard				AB4 Bracket & Three (3) 4" Anchor Bolts
BLDT Dome Top Bollard SS				AB12 Bracket & Three (3) 12" Anchor Bolts
				AB15 Bracket & Three (3) 15" Anchor Bolts
				90BS 90° Beam Spread
				180BS 180° Beam Spread
				270BS 270° Beam Spread

BOLLARDS - 15W LED


OUTDOOR LIGHTING

LINE DRAWINGS

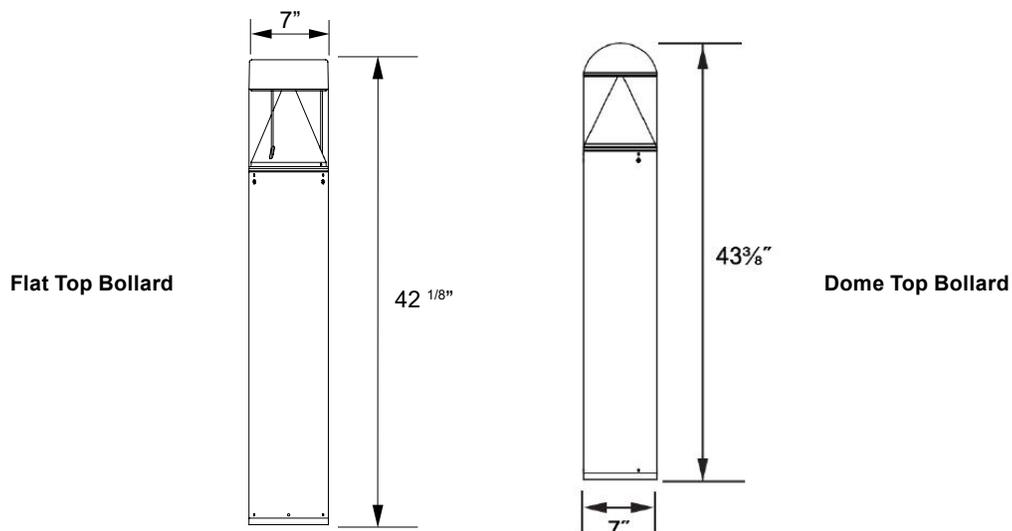


MOUNTING OPTIONS AND ACCESSORIES

- **AB4** - Mounting kit, includes bracket & three (3) 4" anchor bolts
- **AB12** - Mounting kit, includes bracket & three (3) 12" anchor bolts
- **AB15** - Mounting kit, includes bracket & three (3) 15" anchor bolts
- **RPL** - Replacement Polycarbonate Lens




RPL



ABx (x = inches: 4, 12, 15)

FACTORY SELECT COLOR GUIDE

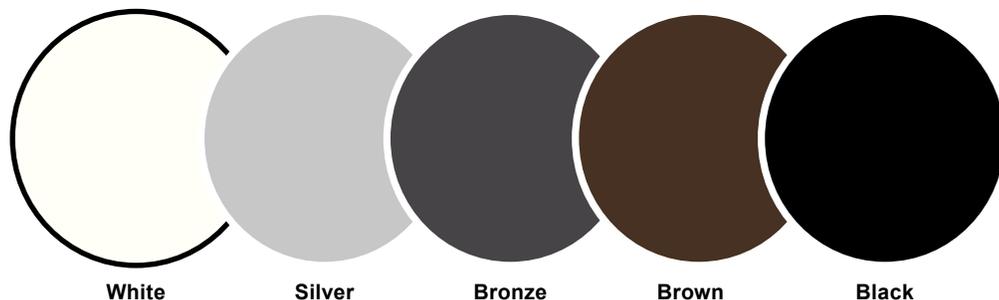

White

Silver

Bronze

Brown

Black

COLOR NAME AND DESCRIPTION	SHEEN	PRODUCT	VENDOR	PRICING
WHT - ILP White	SEMI GLOSS	POLANE T	SHERWIN-WILLIAMS	Contact Factory for Pricing
SLV - ILP Silver - Ultrasonic Chrome	GLOSS	POLANE T	SHERWIN-WILLIAMS	Contact Factory for Pricing
BRZ - ILP Bronze - std. & in stock	SEMI GLOSS	POLANE T	SHERWIN-WILLIAMS	Standard
BRN - ILP Brown	SEMI GLOSS	POLANE T	SHERWIN-WILLIAMS	Contact Factory for Pricing
BLK - ILP Black	SEMI GLOSS	POLANE T	SHERWIN-WILLIAMS	Contact Factory for Pricing
Stainless Steel	N/A	N/A	N/A	Standard (BLDT)

**COLORS SHOWN ABOVE ARE TO BE USED AS REFERENCE, NOT EXACT MATCH.
PLEASE REQUEST PAINT CHIPS FOR EXACT MATCH.**