

PROJECT: TYPE:

LOCATION: CAT:



Description

Trulux tunable remote control for tunable CCT light control; 1-4 zone operation, 4 preset levels, and 1-3 scene memory.

Features

- Press center for On/Off control
- Press shaded icons for intensity levels (25-50-75-100%); hold for full range dimming (1-100%)
- Slide color adjustment wheel for 2700K-6000K light control
- Save up to three custom scenes/color temperatures and 4 zones
- Radio frequency (RF) signal range up to 65 feet
- Battery operated (3 AAA batteries not included)
- Control multiple receivers in multiple zones
- Requires Trulux RF receiver for operation (sold separately)

Mounting

Hand-held remote includes wall-mount caddy

Applications

Dimming, CCT, scene control, and zone control for tunable CCT

Warranty


3 years

Technical Information



Voltage	3.6V DC Operation voltage (battery operated)
Battery Type	(3) AAA type (not included)
Frequency	916.5MHz RF wireless
Operating Temperature	0° - 40°C
Relative Humidity	8% - 80%
Rating	FCC Compliant, RoHS Compliant, dry location

Dimensions

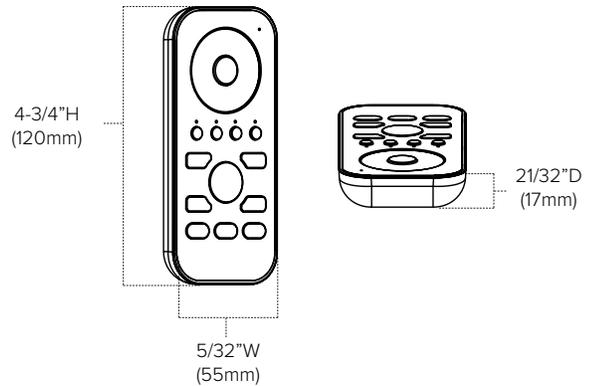

Required Receivers

Part Number	Description	Application	Input	Current	Output	Listing	Dimensions
REC-5A-4Z	Trulux RF Constant Voltage Receiver	Dry location	12-36V DC	4x5A	4x(60-180)W	RoHS	7-1/16" x 1-13/16" x 6-23/32" (178.9mm x 45.5mm x 18.6mm)

Ordering Information

Trulux Tunable Remote Control

MODEL: **TWRF** — TYPE: **3AAA**

TWRF-3AAA includes:

- (1) Trulux Tunable Remote Control
- (requires (3) AAA batteries & Trulux receiver)

Example Part # **TWRF-3AAA**

TWRF — **3AAA**