PROJECT:	TYPE:

LOCATION: CAT:









### Description

Line-voltage, high performance, easy to install puck lights with swivel feature

#### **Features**

- 2700K or 3000K color temperature options
- Zinc alloy light housing with aluminum heat sink
- Stamped steel surface collar with brushed nickel or powder coat finish to match
- Spring steel clips secure housing in surface collar
- Diffuse, polycarbonate lens with 30° swivel capability
- Available in three puck kits, single put kits, or individual linking pucks for increasing the number of pucks in a kit
- Link up to 20 pucks together
- Plug-in installations can be controlled by inline roll switch on power cord; hardwire installations are controlled by wall control or rocker switch on hardwire box

### Mounting

Surface or recess mount (2-3/8" cut-out); mounting screws included

### **Applications**

Display shelves, under-cabinets, in cabinets

### Technical Information










Voltage	120V AC, 60Hz						
CCT	2700K	3000K					
CRI	90+	90+					
Wattage	4.3W per puck	4.3W per puck					
Lumens	200Lm (BK), 200LM (NK), 230Lm (WH)	235Lm (BK), 235LM (NK), 250Lm (WH)					
Max Run	20 pucks						
Beam Angle	120°						
Lens Swivel	30°						
Dimming	10-100% with most CFL/LED and low-voltage electronic						
Rating	cETLus Listed, dry locations						
Rated Life	50,000 Hours						





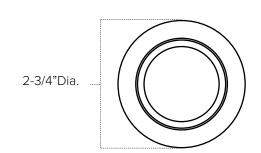


# Recommended Power Supplies

Part Number	Description	Finish	Application	Primary & Secondary	Total Wattage	Listing	Dimensions
ALSLBOX	Slimline Hardwire Box with	Black	Dry location	120V AC	86 x 2 (5A Max)	cURus	4"x2.5"x1"
ALSLBOX-WH-B	(2) Molex outlets and On/Off switch; (Required for Hardwire operation)	White					
ALLVP-PC6	6ft power cord with slide on plug, roll switch,	Black	- Dry location	120V AC	86	cULus	6ft length
ALLVP-PC6-WH	and female plug	White					



## Ordering Information

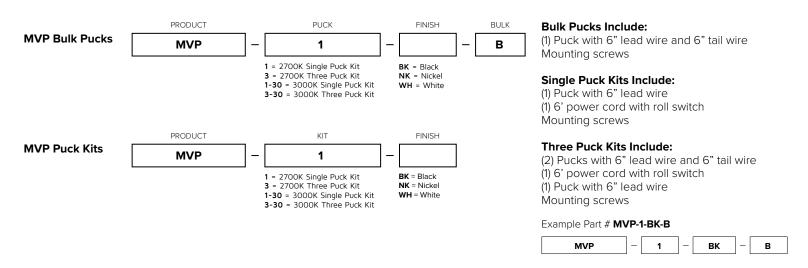

### Accessories

Image	Part Number	Length	Finish	Description
	ALLVP-PC6	6ft	Black	120V Power Cable + Plug w/ Inline Rotary Switch
7 6	ALLVP-PC6-WH	6ft	White	120V Power Cable + Plug w/ Inline Rotary Switch
P	ALLVPEX12	12"	Black	Linking and Linking ACONIC critical with an all 16 and 18
	ALLVPEX24	24"		Linking cable; 18AWG wire with male/female connectors
J 53	ALLVPEX12WH	12"	White	
	ALLVPEX24WH	24"		Linking cable; 18AWG wire with male/female connectors

NOTE	ΞS			