

# CANOPY LIGHT CPGX SERIES

### **Features & Benefits**

Sealed Die-Casting Aluminum Housing with Stainless Steel Fasteners

Pendant Mounting or Direct Surface Mounting

PIR Sensor and Emergency Battery Available

UL Listed for Wet Locations

Pendant mounting or direct surface mounting

5-year limited warranty



LOCATION







#### Housing

One piece die cast housing better waterproofing, suitable for both indoor and outdoor application.

#### **Mounting Bracket**

WET

Suitable for J-BOX mounting, and easy for installation, also support pendant mounting, wires coming out from the back for easier wire connections.



#### Photometry

Parking Garage Photometry and polycarbonate optical lens with heat resisting.

#### 1/2inch threaded hole

Support wires coming from the hole for easier wire connections. Optional PIRsensor and Emergency Battery.

### **Technical Parameters**

Power	Light Output	Power Input	Operating Temperature	Efficacy
27W - 60W	3,750 - 8,000 lm	120-277V, 347/480V	-40°F- 104°F	Up to 141av Im/W
Color Temperature	Color Temperature CRI		Dimming	Motion Sensor
4000K, 5000K	70 CRI	UL, DLC Premium	1-10V Dimming	Bi-Level PIR Sensor
Emergency Battery	Surge Protection	Finish		
8W 900 lm	10k	DB, W		

### **Performance Data**

5000K					
LED Watts	Lumens	LPW			
27W	3,800 lm	141 lm/W			
40W	5,450 lm	136 lm/W			
60W	8,000 lm	133 lm/W			


4000K					
LED Watts	Lumens	LPW			
27W	3,750 lm	139 lm/W			
40W	5,350 lm	134 lm/W			
60W	7,800 lm	130 lm/W			




Note: Motion Sensor & Emergency Battery require 0-10V Dimmable Driver



## **Product Dimensions**

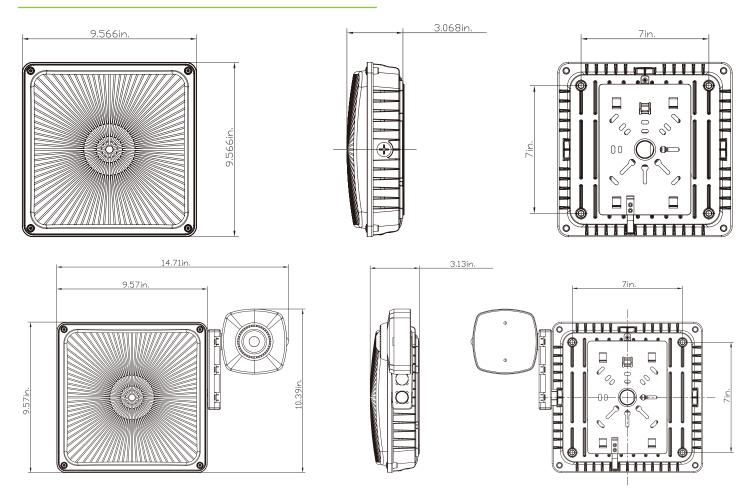

### **Photometrics**



## **DLC Listed Models**

System Watt	Voltage	ССТ	DLC NO	DLC Classification
40W	120-277V	5000K	CPGX-40W-50K-[Blank,W] - D - [Blank,M,EM,MEM]	Premium
60W	120-277V	5000K	CPGX-60W-50K-[Blank,W] - D - [Blank,M,EM,MEM]	Premium

Note: Only Above Models are Currently DLC Listed

