

CANOPY LIGHT CPG SERIES

Features & Benefits

- Sealed Die-Casting Aluminum Housing with Stainless Steel Fasteners Pendant Mounting or Direct Surface Mounting Parking Garage Lens for Contoured Light Distribution
- PIR Sensor and Emergency Battery Available
- UL Listed for Wet Locations
- 5-Year Limited Warranty

Mounting Brackit

Suitable for J-BOX mounting, and easy for installation, also support pendant mounting, wires coming out from the back for easier wire connections









1/2inch threaded hole

Support wires coming from the hole for easier wire connections.



Housing

One piece die cast housing better waterproof, suitable for both indoor and outdoor application

PIR Sensor

Optional PIR Sensor allows for security and energy saving.

Photometrics

Optional Parking Garage Photometry or Low Bay Photometry as per applications.

Technical Parameters

Power	Light Output	Power Input	Operating Temperature	Efficacy
30W - 60W	3,600 lm -7,100 lm	120-277V, 347/480V	-40°F- 104°F	Up to 120 lm/W
CRI	Certifications	Motion Sensor	Driver	Color Temperature
70 CRI	UL, DLC Premium	Bi-Level PIR Sensor	1-10V Dimming	4000K, 5000K
Finish				
W, DB, B				

Performance Data

5000K					
LED Watts	Lumens	LPW			
30W	3,600 lm	120 lm/W			
45W	5,000 lm	111 lm/W			
60W	7,100 lm	118 lm/W			

4000K					
LED Watts	Lumens	LPW			
30W	3,500 lm	117 lm/W			
45W	4,900 lm	109 lm/W			
60W	7,000 lm	117 lm/W			

Ordering Information


Example: CPG-45W-50K

(Optional)






Product Dimensions

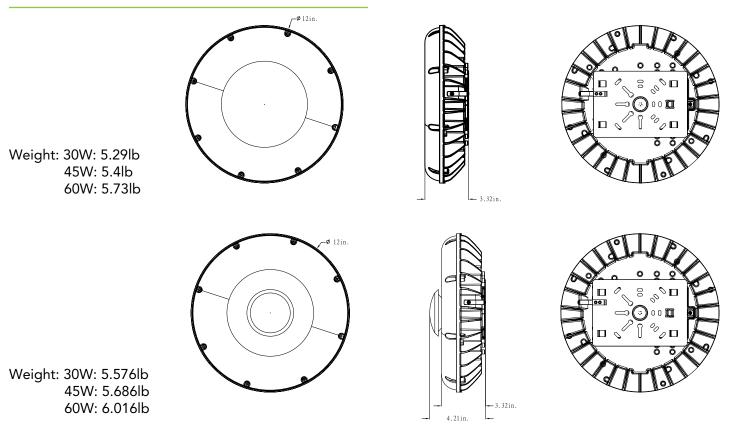

Photometrics



DLC Listed Models

System Watt	Voltage	CCT	DLC NO	DLC Classification
60W	120-277V	4000K	CPG-60W-40K-[BlanK,M]	Premium
60W	W 120-277V 5000K CPG-60W-50K-D-[BlanK,M]		Premium	

Note: Only Above Models are Currently DLC Listed

