



WML2 SERIES Outdoor Lighting

WML2-50W-30K-SM
WML2-50W-40K-SM
WML2-50W-50K-SM

Customer Name: _____
Project Name: _____
Note: _____ | Type: _____



Selection:



10"(W) x 5 3/4"(H) x 5 1/2"(D)

This is a LED Non-Cutoff 2nd Generation Wall Pack outdoor lighting, ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

Features

- Four 1/2" Knockout: 1 Top, 1 on Each Side, 1 Rear
- Polycarbonate Optic Lens
- Die-Cast Aluminum With Powder Coat Finish (Dark Bronze)
- 7-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 50W
- Power Factor: >0.95
- Efficacy: 110/ 115/ 120 LPW

Mechanical:

- Die-Cast Aluminum With Powder Coat Finish (Dark Bronze)
- Same Footprint as Traditional HID Wall Packs
- Rated life: 70,000 Hrs
- Operating Temperature: -40°F to 104°F
- Four 1/2" Knockout: 1 Top, 1 on Each Side, 1 Rear
- 7-Year Warranty
- IP 65, Suitable for Wet Locations

Lighting:

- Chip: Philips Lumileds LEDs
- Polycarbonate Optic Lens
- Total Lumens: 5500LM/ 5750LM/ 6000LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 80

Applications:



- General site Lighting
- Alleys
- Loading docks
- Doorways
- Pathways
- Parking areas

Other Models:


• 28W | 3500LM | WML2-28W-30K-HL-SM • 48W | 6000LM | WML2-50W-30K-HL • 80W | 9750LM | WML2-80W-30K-HL • 120W | 15000LM | WML2-120W-30K-HL • 150W | 17700LM | WML2-150W-30K-HL
• 28W | 3640LM | WML2-28W-40K-HL-SM • 48W | 6240LM | WML2-50W-40K-HL • 80W | 10140LM | WML2-80W-40K-HL • 120W | 15600LM | WML2-120W-40K-HL • 150W | 18450LM | WML2-150W-40K-HL
• 28W | 3780LM | WML2-28W-50K-HL-SM • 48W | 6480LM | WML2-50W-50K-HL • 80W | 10530LM | WML2-80W-50K-HL • 120W | 16200LM | WML2-120W-50K-HL • 150W | 19200LM | WML2-150W-50K-HL



Photometrics: WML2-50W-SM



BUD Rating: B2-U3-G3

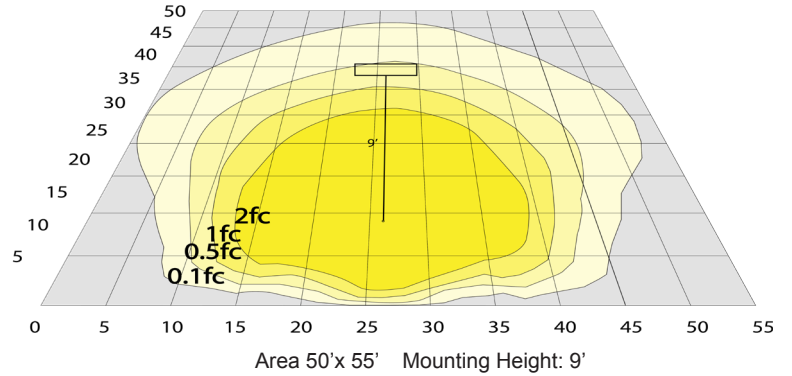

Other Views:



Side View



Front View



Back View

Performance Table: WML2-50W-SM

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WML2-50W-30K-SM	50W	120~277V	5500LM	3000K	B2-U3-G3	110
WML2-50W-40K-SM	50W	120~277V	5750LM	4000K	B2-U3-G3	115
WML2-50W-50K-SM	50W	120~277V	6000LM	5000K	B2-U3-G3	120

Sample Ordering

Model Wattage Color Temp. Housing Size

WML2 - 50W - - SM

3000K
4000K
5000K

Factory-Installed Options:

Blank = No Option For Accessories
 OPT-EM-OD1EXT= EMERGENCY BACKUP BATTERY, BACK BOX
 OPT-SEN-3MRLV-5= PROGRAMMABLE MICROWAVE BI-LEVEL
 OPT-CLR-85= COLOR PAINT
 OPT-PC-B = PHOTOCELL 120-277V
 WEC-7RC = OPTIONAL REMOTE

FACTORY-INSTALLED OPTIONS:



OPT-EM-OD1EXT



WEC-7RC



OPT-PC-B



OPT-SEN-3MRLV-5

Example:

1. WML2-50W-50K-SM

(FOR WML2 50W 5000K FIXTURE 120-277V)

2. WML2-50W-50K-SM
 OPT-EM-OD1EXT

(FOR WML2 50W 5000K FIXTURE 120-277V)
 (EMERGENCY BACKUP BATTERY, BACK BOX)

