

LOHB SERIES OUTDOOR LIGHTING

LOHB-2FT-50W-30K
LOHB-2FT-50W-50K

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!



Selection:




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

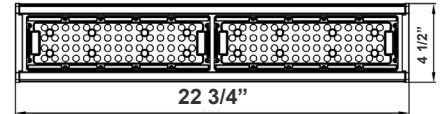

22 3/4"(L) x 3"(H) x 4 1/2"(W)

This outdoor lighting is Ideal for Wall wash, sign, suspended outdoor/indoor lighting, small stadium and tracks

Features

- Die-cast Aluminum with Black Powder Coat Finish
- Removable 1/2" NPT Threaded Knuckles Included
- 7-Year Warranty
- Removable Half Shroud Included

Technical Specifications

Electrical:

- Voltage: 120~277V; 50/60Hz AC
- THD: <20%
- Power Factor: >0.9
- Wattage: 50W
- Efficacy: 130 LPW

Mechanical:

- Die-cast Aluminum with Black Powder Coat Finish
- Removable 1/2" NPT Threaded Knuckles Included
- Cord Type: 3.2 SJTW 18/3 AWG cable
- Removable Half Shroud Included
- Operating Temp: -40°F to 104°F
- Rated life: 50,000 hrs
- Wet Location
- IP Rating: IP65

Lighting:

- LED: Philips Lumileds Luxeon 3030 High Flux LED
- Total Lumens: 6500LM/6700LM
- Color Temperatures: 3000K/5000K
- Color Rendering Index: CRI ≥ 70
- Beam Angle: 90°

Applications:

- Ideal for Wall wash, sign, suspended outdoor/indoor lighting, small stadium and tracks

Other Models:

- 120W | 15300LM | LOHB-4FT-120W-30K
- 120W | 15600LM | LOHB-4FT-120W-50K




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co




WG-Z7-2D-2Z

Photometrics: LOHB-2FT

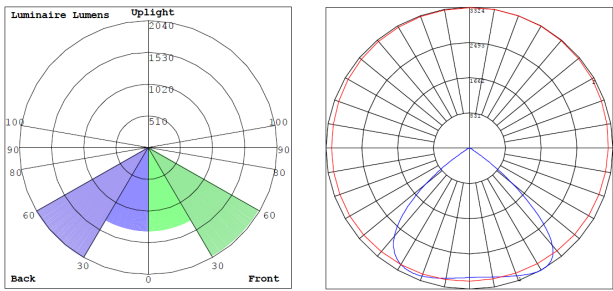

BUG Rating: B3-U0-G0

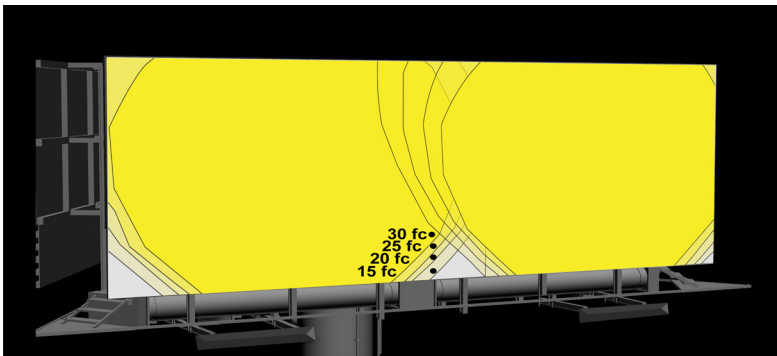

Billboard Size: 5'x 17.5' Mounting Distance: 6'

Other Views:



Side View



Front View



Back View

Performance Table: LOHB-2FT

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LOHB-2FT-50W-30K	50W	120-277V	6500LM	3000K	B3-U0-G0	130
LOHB-2FT-50W-50K	50W	120-277V	6700LM	5000K	B3-U0-G0	134

Sample Ordering

Model

Size

Watt

Color Temp.

LOHB

-

2FT

-

50W

-

30K = 3000K
50K = 5000K

Accessories:

Blank = No Option For Accessories
LOHB-C= Surface/Ceiling mounting conversion Bracket (set of 2)
LOHB-H-2FT= 2Ft. Mounting Bracket, Hot-Rolled Steel

ACCESSORIES:



LOHB-C
Surface/Ceiling
mounting
conversion
Bracket, (set of 2)



LOHB-H-2FT
2Ft. Mounting
Bracket, Hot-Rolled Steel
(The picture shows 2-fixture installation
Can be used with one fixture too)

Example:

1. LOHB-2FT-50W-30K

(FOR LOHB 50W 3000K OUTDOOR LIGHT FIXTURE 120-277V)
2. LOHB-2FT-50W-30K
LOHB-C

(FOR LOHB 50W 3000K OUTDOOR LIGHT FIXTURE 120-277V)
(FOR SURFACE/CEILING MOUNTING CONVERSION BRACKET)