

CDL2 SERIES

OUTDOOR LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

CDL2-60CW
CDL2-60NW
CDL2-60WW




Ideal for indoor parking lots, commercial buildings, schools, warehouses, retail centers, apartment complexes. Designed for 9 to 16-foot mounting.

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

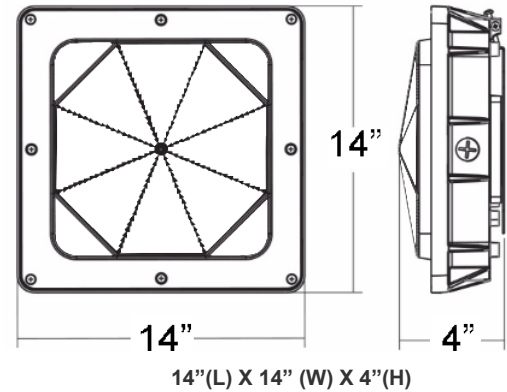

Features

- Housing: Die-cast aluminum with prismatic polycarbonate lens redesigned for LED
- Designed for 9 to 16 foot mounting heights
- Factory- Installed Options: Battery Backup, Motion Sensor
- 7-year warranty

Technical Specifications

Electrical:

- Input Wattage: 60W
- Input Current: 0.6A MAX
- Input Voltage: 120-277VAC 50/60Hz
- Power factor: >0.90
- Other wattages: 25W/ 45W/ 80W

Mechanical:

- Die-cast aluminum with bronze
- Four 1/2" threaded hubs located on four sides of the housing
- Prismatic polycarbonate lens
- Lifespan: 70000 Hrs
- Operating temperature: -4°F ~ 104°F
- IP rating: IP65, Wet Locations

Lighting:

- Dimming: 0~10V dimmable
- LED type/ Brand: SMD 3030/ Philips Lumileds LEDs
- Total lumens: 7100 LM/ 7100 LM/ 7400 LM
- Color temperature: 3000K/ 4000K/ 5000K
- Color rendering index: >80
- Beam angle: 150°

Applications:

- Indoor Parking
- Commercial Buildings
- School
- Warehouses
- Complexes
- Apartment
- Garage

Other Models:



- | | | |
|----------------------------|----------------------------|----------------------------|
| • 25W 2880LM CDL2-25CW | • 45W 4400LM CDL2-45CW | • 80W 9500LM CDL2-80CW |
| • 25W 2800LM CDL2-25NW | • 45W 4300LM CDL2-45NW | • 80W 9400LM CDL2-80NW |
| • 25W 2780LM CDL2-25WW | • 45W 4200LM CDL2-45WW | • 80W 9400LM CDL2-80WW |




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com | www.westgatecontrols.co



Photometrics: CDL2-60W




BUD Rating: B2-U2-G2

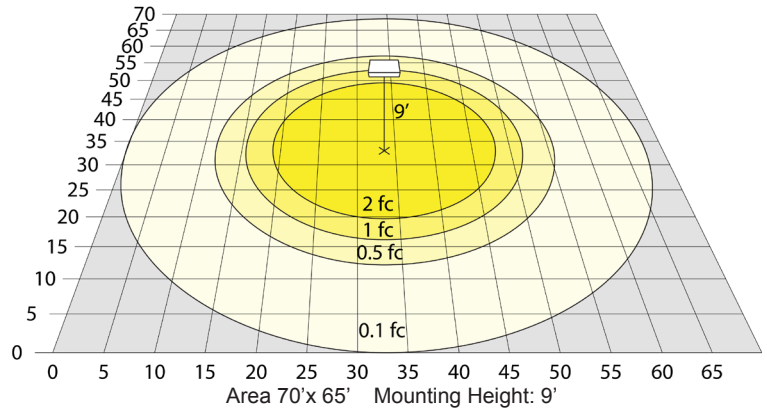


Other Views:



Side View



Front View

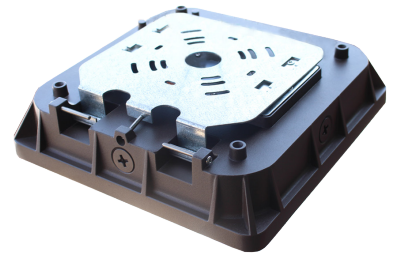

Back View

Performance Table: CDL2-60W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CDL2-60CW	60W	120~277V	7400 LM	5000K	B2-U2-G2	123
CDL2-60NW	60W	120~277V	7100LM	4000K	B2-U2-G2	118
CDL2-60WW	60W	120~277V	7100LM	3000K	B2-U2-G2	118

Sample Ordering

Model	Wattage	Color Temp.
CDL2	60W	
		WW = 5000K NW = 4000K CW = 5000K


Factory Installed Options

Blank = No Option For Factory-Installead
 OPT-EM-OD1INT = INTERNAL EMERGENCY BACKUP BATTERY
 OPT-SEN-3MR-4 = PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR
 OPT-PC-B = PHOTOCELL
 WEC-8RC= OPTIONAL REMOTE CONTROL
 OPT-TRS-T20= TAMPER RESISTANT SCREW

SENSOR AND REMOTE CONTROL OPTIONS



MOUNTING OPTIONS

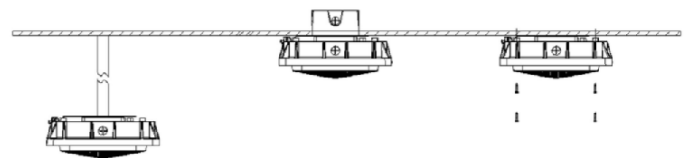

Example:

1. CDL2-60CW
2. CDL2-60CW
WEC-8RC
3. CDL2-60CW
WEC-8RC
OPT-SEN-3MR-4

(CDL2 60W 5000K fixture 120V-277V)

(CDL2 60W 5000K fixture 120V-277V)
(Remote Control)

(CDL2 60W 5000K fixture 120V-277V)
(Remote Control)
(Programmable Microwave Bi-Level)

WESTGATE

Phone: (877) 805-2252 | Fax: (877) 805-2252
 www.westgatemfg.com | www.westgatecontrols.co

