

JOB NAME: _____

DATE: _____


TYPE: _____



Surface Mount
Bracket Included

DIMENSIONS:

23.70"(L)X11.85"(W)X0.98"(H)

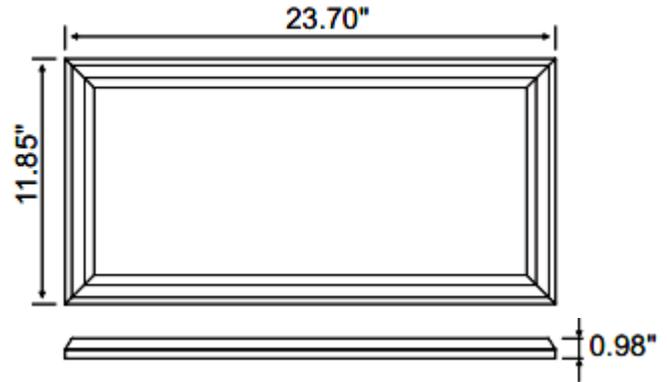

- LPS-1X2-50K-D
- LPS-1X2-40K-D
- LPS-1X2-30K-D

LED SURFACE MOUNT PANELS

Ideal for hotel, offices, retail outlets, restaurant, parking garages, storage room, conference room, education facilities and more.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 25W
- Power factor: >0.95
- Efficacy: 100LM/W

HOUSING SPECIFICATIONS:

- White Finish Surface mount panel
- Internal Driver
- Operating temperature: -13°F ~ 104°F
- Lifespan: 50,000 hrs.
- Suitable for Damp Locations

CERTIFICATIONS: UL



| MODEL | WATTS | VOLTAGE | LUMENS UP/DOWN | COLOR TEMP |
|---------------|-------|------------|----------------|------------|
| LPS-1X2-50K-D | 25W | 120~277VAC | 2500LM | 5000K |
| LPS-1X2-40K-D | 25W | 120~277VAC | 2500LM | 4000K |
| LPS-1X2-30K-D | 25W | 120~277VAC | 2500LM | 3000K |

LIGHTING SPECIFICATIONS:

- Dimming: 0~10V Dimmable
- Recommended Dimmers: DIVA-DVTV(LUTRON),IP710-DL(LEVITON)
- Total lumens: 2500LM
- Color temperature: 5000K/4000K/3000K
- Color rendering index: >80

WARRANTY: 5 years

