

LTRE-1X4-MCTP





This Troffer Light is ideal for Hotels, Offices, Retail Outlets, Restaurants, Storage Rooms, Conference Rooms, Education Facilities, and more.

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

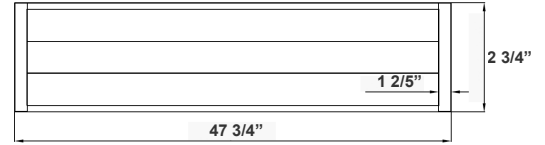

12 3/4" x 47 3/4" x 2 1/2"

## Features

- 5-Year Warranty
- White Finish
- 50,000 Hours Rated Life
- Lens: Polycarbonate
- Multi Color Temperature & Multi Power (selectable switch on back of fixture)

## Technical Specifications

### Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 26W/ 32W/ 40W
- Power Factor: >0.97
- Efficacy: 125 LPW

### Mechanical:

- White Finish
- Cold-Rolled Steel, 2.6" thickness
- Earthquake Hooks Built into the Housing
- Operating Temperature: -4°F ~ 122°F
- Lifespan: 50,000 hrs

### Lighting:

- Dimmable: 0~10V Dimming
- LED SMD type: 2835
- Total Lumens: 3250LM/ 4000LM/ 5000LM
- Color Temperatures: 3500K/ 4000K/ 5000K
- Multi CCT & Multi Power (selectable switch on back of fixture)
- Color Rendering Index: CRI ≥ 80

### Applications:



- This LED Center Basket Troffer Light is ideal for Hotels, Offices, Retail Outlets, Restaurants, Storage

### Other Models:


- 40W | 5000LM | LTRE-2X2-MCTP
- 50W | 6250LM | LTRE-2X4-MCTP



## Photometrics: LTRE-1X4-MCTP



BUG Rating: B2-U2-G1

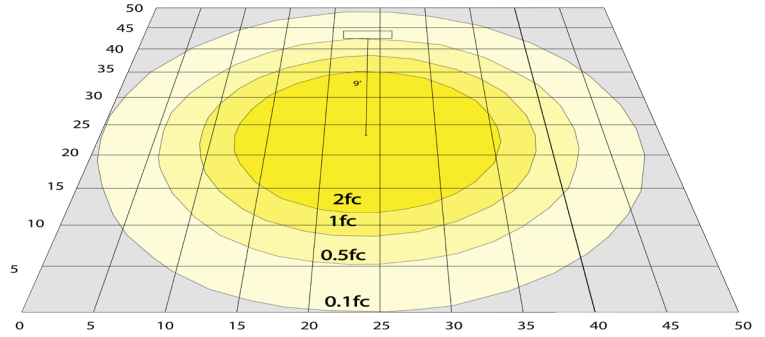

Area 50'x 50' Mounting Height: 9'

## Other Views:



Side View



Front View



Back View

## Performance Table: LTRE-1X4-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LTRE-1X4-MCTP	26W 32W 40W	120~277V	3250LM 4000LM 5000LM	3500K 4000K 5000K	B2-U2-G1	125

## Sample Ordering

Model Size Watt/Color Temp.

LTRE - 1X4 - MCTP

## Accessories:

Blank = No Option For Accessories

LTRE-1X4-SMK = SURFACE MOUNTING KIT LTRE-1X4

WEC-7RC=OPTIONAL REMOTE CONTROL

## Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-LTRE= EMERGENCY BACKUP BATTERY MOUNTED ON TOP OF FIXTURE

OPT-FWH-63= 6FT 3-WIRE WHIP

OPT-FWH-65= 6FT 5-WIRE WHIP


OPT-FWH-66= 6FT 6-WIRE WHIP

OPT-SEN-3MRLV-5=PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR

## Example:

1. LTRE-1X4-MCTP (FOR LTRE 1X4 MCTP FIXTURE 120-277V)
2. LTRE-1X4-MCTP LTRE-1X4-SMK (FOR LTRE 1X4 MCTP FIXTURE 120-277V) (SURFACE MOUNTING KIT LTRE-1X4)
3. LTRE-1X4-MCTP LTRE-1X4-SMK OPT-EM-LTRE (FOR LTRE 1X4 MCTP FIXTURE 120-277V) (SURFACE MOUNTING KIT LTRE-1X4) (EMERGENCY BACKUP BATTERY)

## ACCESSORIES & MOUNTING KIT:

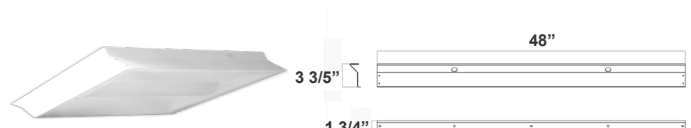

LTRE-1X4-SMK



WEC-7RC

## BUILT-IN SWITCH:



MULTI-CCT & WATTAGE

## FACTORY-INSTALLED OPTIONS:



OPT-EM-LTRE



OPT-SEN-3MRLV-5



OPT-FWH-63  
OPT-FWH-65  
OPT-FWH-66

