

# DLS SERIES Residential Lighting


DLS6-MCT-277V



Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_ Type: \_\_\_\_\_



5 4/5" x 1 1/4"

Disk lights have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications.

## Features

- Die-cast Aluminum. Powder-Coated
- Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Wet Location Performance
- Closed Cell Neoprene Foam Gasket
- Multi CCT (Selectable Switch on LED Board Under the Lens)

## Technical Specifications

### Electrical:

- Voltage: 277V AC
- Power Factor: >0.90
- Wattage: 15W
- Efficacy: 70 LPW

### Mechanical:

- White Finish
- Die-cast Aluminum. Powder-Coated
- Gasket: Closed Cell Neoprene Foam Gasket
- Fits on 4"Octagonal (4O) or 3"Octagonal (3O) Electrical Boxes
- Recessed Mounting Kit Included for Recessed/Retrofit Installation
- Maximum Ambient Temperature: 104°F
- 5-Year Warranty

### Lighting:

- Lens: White Translucent Acrylic
- LED: Unique DOB (Driver On Board) LED Board Enclosed in Clear PC Cover for Better Wet Location Performance  
Total Lumens: 1050LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Multi CCT (Selectable Switch on LED Board Under the Lens)
- Color Rendering Index: CRI ≥ 90
- Rated life: 50,000 hrs

### Applications:



- Disk lights have been designed to be a flexible lighting solution for retrofit and new construction applications, Ideal for closets, storage areas, attics, corridors, or general lighting solutions for residential and commercial applications

### Other Models:


- 30W | 1800LM | DLS12-MCT-277V



## Photometrics: DLS6-MCT-277V



BUG Rating: B1-U2-G1

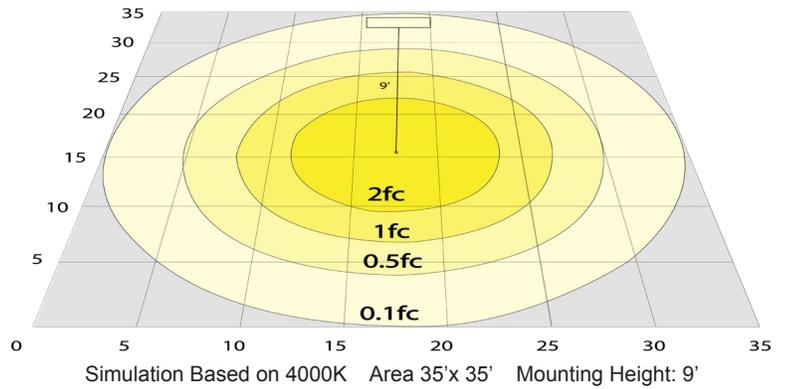

## Other Views:



Side View



Front View



Back View

## Performance Table: DLS6-MCT-277V

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
DLS6-MCT-277V	15W	277V	1000LM	3000K/ 4000K/ 5000K	B1-U2-G1	67

## Sample Ordering

Model Color Temp. Voltage

DLS6 - MCT - 277V

## MOUNTING KIT and OPTION:



Recessed Mounting Kit included

## Other Model:



DLS6-MCT-PIR  
with PIR Motion Sensor



DLS6-MCT

