

FLV12 SERIES OUTDOOR LIGHTING

FLV12-12W-30K
FLV12-12W-50K

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!



Selection:




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

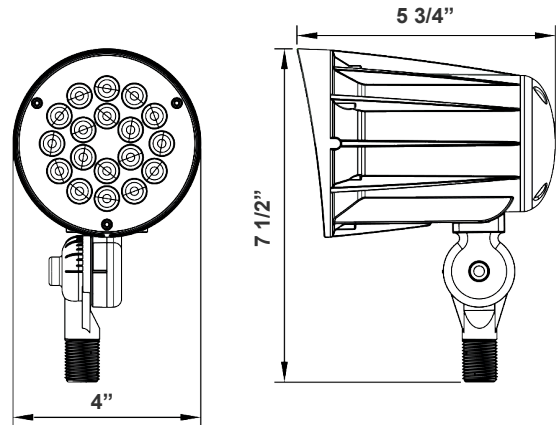

7 1/2" (H) x 4" (W) x 5 3/4" (D)

The fixture has classic traditional appearance, professional light distribution design, 90-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

Technical Specifications

Electrical:

- Voltage: 12V AC/DC
- Power Factor: >0.9
- Wattage: 12W
- Input current: 1A Max
- Efficacy: 100/ 108 LPW

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- 8-1/2" PC Spike Included
- 1/2" Threaded Knuckle Stem
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations
- Rotatable Shroud with Set Screw
- 7-Year Warranty

Lighting:

- Dimmable: Non Dimmable
- LED type/brand: Philips Lumileds LEDs / SMD 3030
- Total lumens: 1200LM/ 1300LM
- Color Temperatures: 3000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 35°
- Lifespan: 70,000 Hrs.

Applications:

- The fixture has classic traditional appearance, professional light distribution design, 90-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

Other Models:

- | | | |
|-----------------------------|--------------------------------|--------------------------------|
| • 6W 500LM FLV12-6W-30K | • 24W 2200LM FLV12-24W-30K | • 32W 3200LM FLV12-32W-30K |
| • 6W 550LM FLV12-6W-50K | • 24W 2500LM FLV12-24W-50K | • 32W 3500LM FLV12-32W-50K |





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-Z8-27-2Z

Photometrics: FLV12-12W

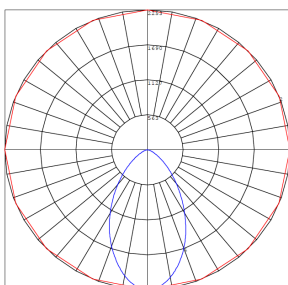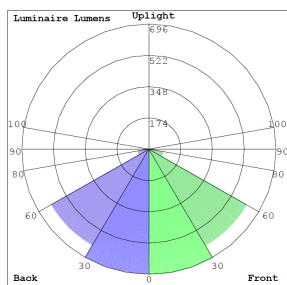

BUG Rating: B2-U1-G0

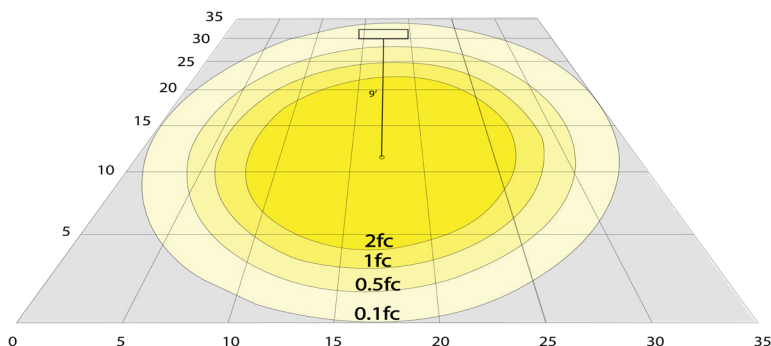

12W 3000K, Area 35'x 35' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: FLV12-12W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
FLV12-12W-30K	12W	12V	1200LM	3000K	B2-U1-G0	100
FLV12-12W-50K	12W	12V	1300LM	5000K	B2-U1-G0	108

Sample Ordering

Model	Watt	Color Temp.
FLV12	12W	<input type="text"/> 30K = 3000K 50K = 5000K

Accessories:

Blank = No Option For Accessories

A-41-BR = 1/2" NPT Hub, Cast Aluminum, Bronze Powder Coat Finish

LSWN1 = Bag of 24, Waterproof Wire Connectors, For Up to Two 14-2 + One 16-2 Cables

LSWN2 = Box of 24, Waterproof Wire Connectors, For Up to Three 12-2 Cables

LSWN2-100 = Jar of 100, Waterproof Wire Connectors, For Up to Three 12-2 Cables

A-41-S = Tree Mounting Base

LG-SMB-BZ = 12V Brass Landscape Tree or Surface Bracket, Antique Bronze Finish

BC-13 = 13" Bungee Cords with Hooks

BC-18 = 18" Bungee Cords with Hooks

BC-24 = 24" Bungee Cords with Hooks

BC-32 = 32" Bungee Cords with Hooks

FL-SH2 = Fits FLD2-28W, FLV12-12W & 24W

ACCESSORIES:



A-41-BR

1/2" NPT hub, Cast aluminum, Bronze Powder coat finish



LSWN1

Bag of 24, Waterproof wire connectors, for up to two 14-2 + one 16-2 cables



LSWN2

Box of 24, Waterproof wire connectors, for up to three 12-2 cables



LSWN2-100

Jar of 100, Waterproof wire connectors, for up to three 12-2 cables



A-41-S

Tree mounting base



LG-SMB-BZ

12V brass landscape tree or surface bracket, antique bronze finish




BC-13/18/24/32

13"/18"/24"/32" Bungee cords with hooks



FL-SH2

Fits FLD2-28W, FLV12-12W & 24W



FL-SH2

4" x 4 1/2"

Example:

1. FLV12-12W-30K-D-KN

(FOR FLV12 12W 30K FIXTURE 12V)

2. FLV12-12W-30K-D-KN

(FOR FLV12 12W 30K FIXTURE 12V)

FL-SH2

(Fits FLD2-28W, FLV12-12W & 24W)

WESTGATE

Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com

