

LF4-12V SERIES OUTDOOR LIGHTING

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

LF4-12V-12W-30K
LF4-12V-12W-50K

Customer Name: _____


Project Name: _____

Note: _____

Type: _____



Selection:

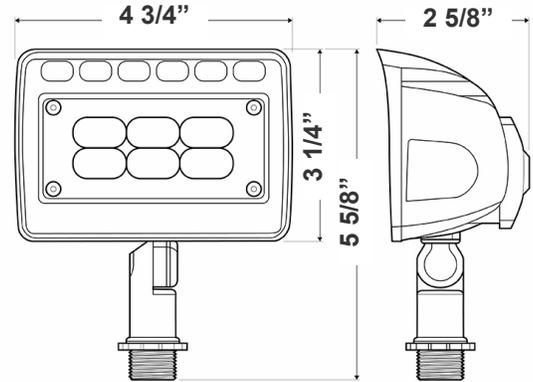

3 1/4"(H) x 4 3/4"(W) x 2 5/8"(D)

The fixture has classic traditional appearance, professional light distribution design, 90-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

Technical Specifications

Electrical:

- Voltage: 12V
- Wattage: 12W
- Power factor: >0.95
- Efficacy: 90/ 105 LM/W

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- 8-1/2" PC Spike Included
- 1/2" Threaded Knuckle Stem
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations
- Rotatable Shroud with Set Screw
- 7-Year Warranty

Lighting:

- LED Type/Brand: Lumileds LEDs / SMD 3030
- Total Lumens: 1080LM and 1260LM
- Color Temperature: 3000K / 5000K
- Color Rendering Index: >82
- Beam Angle: 90° x 120°
- Lifespan: 70000 Hrs.

Applications:

- The fixture has classic traditional appearance, professional light distribution design, 90-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

Other Models:

- 6W | 440LM | LF4-12V-6W-30K
- 6W | 500LM | LF4-12V-6W-50K
- 24W | 2155LM | LF4-12V-24W-30K
- 24W | 2500LM | LF4-12V-24W-50K
- 30W | 2700LM | LF4-12V-30W-30K
- 30W | 3150LM | LF4-12V-30W-50K
- 50W | 4500LM | LF4-12V-50W-30K
- 50W | 5250LM | LF4-12V-50W-50K





Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-Z8-27-2Z

Photometrics: LF4-12V-12W



BUG Rating: B1-U1-G0

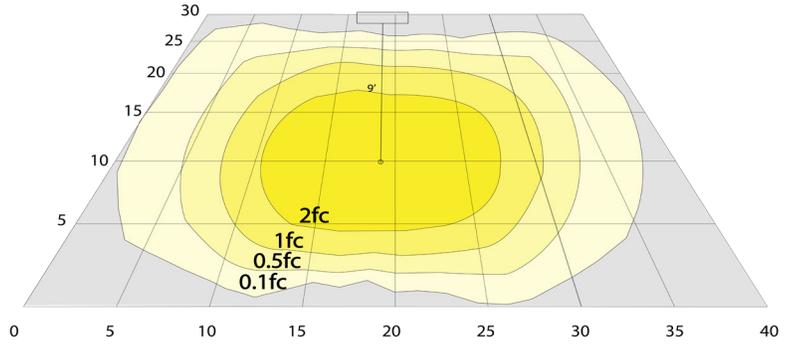

Area 30'x 40' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: LF4-12V-12W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LF4-12V-12W-30K	12W	12V	1080LM	3000K	B1-U1-G0	90
LF4-12V-12W-50K	12W	12V	1260LM	5000K	B1-U1-G0	105

Sample Ordering

Model	Volt	Watt	Color Temp.
LF4	12V	12W	<input type="text"/>
			30K = 3000K 50K = 5000K

Accessories:

Blank = No Option For Accessories
A-41-BR = 1/2" NPT Hub, Cast Aluminum, Bronze Powder Coat Finish
LSWN1 = Bag of 24, Waterproof Wire Connectors, For Up To Two 14-2 + One 16-2 Cables
LSWN2 = Box of 24, Waterproof Wire Connectors, For Up To Three 12-2 Cables
LSWN2-100 = Jar of 100, Waterproof Wire Connectors, For Up To Three 12-2 Cables
A-41-S = Tree Mounting Base
LG-SMB-BZ = 12V Brass Landscape Tree or Surface Bracket, Antique Bronze Finish
BC-13 = 13" Bungee Cords with Hooks
BC-18 = 18" Bungee Cords with Hooks
BC-24 = 24" Bungee Cords with Hooks
BC-32 = 32" Bungee Cords with Hooks
LF4-SH1 = Fits LF4-12W, LF4-12V-6W & 12W (Polycarbonate)

ACCESSORIES:



A-41-BR

1/2" NPT hub, Cast aluminum, Bronze Powder coat finish



LSWN1

Bag of 24, Waterproof wire connectors, for up to two 14-2 + one 16-2 cables



LSWN2

Box of 24, Waterproof wire connectors, for up to three 12-2 cables



LSWN2-100

Jar of 100, Waterproof wire connectors, for up to three 12-2 cables



A-41-S

Tree mounting base



LG-SMB-BZ

12V brass landscape tree or surface bracket, antique bronze finish




BC-13/18/24/32

13"/18"/24"/32" Bungee cords with hooks



LF4-SH1

Fits LF4-12W, LF4-12V-6W & 12W (Polycarbonate)



LF4-SH1

2 1/2" x 4 1/2"

Example:

1. LF4-12V-12W-30K (For LF4 12W 30K Fixture 12V)
2. LF4-12V-12W-30K (For LF4 12W 30K Fixture 12V)
 LF4-SH1 (Fits LF4-12W, LF4-12V-6W & 12W)

WESTGATE

Phone: (877) 805-2252 | Fax: (877) 805-2252
 www.westgatemfg.com

