

LF4-12V SERIES OUTDOOR LIGHTING

LF4-12V-30W-30K
LF4-12V-30W-50K

Customer Name: _____


Project Name: _____

Note: _____

Type: _____



Selection:

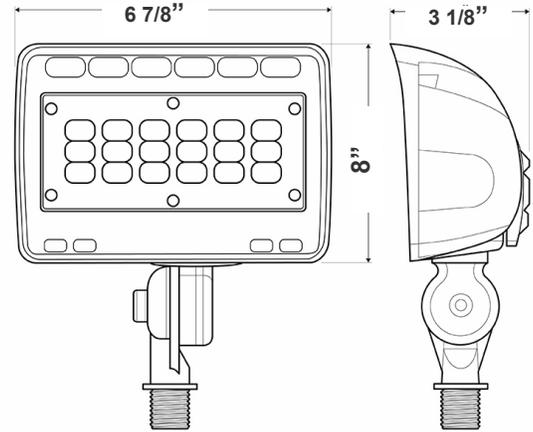

8"(H) x 3 1/8"(W) x 6 7/8"(D)

The fixture has classic traditional appearance, professional light distribution design, 90-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

Features

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- 1/2" Threaded Knuckle Stem
- 7-Year Warranty
- Lens Type: Plaid Tempered Glass + Aluminum Reflectors

Technical Specifications

Electrical:

- Voltage: 12V
- Wattage: 30W
- Power factor: >0.95
- Efficacy: 90/ 105 LM/W

Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish (Dark Bronze)
- Solid State Lighting Technology for Long Life, No Maintenance Needed and High-Efficiency
- High Conductive Aluminum LED Board
- 8-1/2" PC Spike Included
- 1/2" Threaded Knuckle Stem
- IP Rating: IP65
- Operating Temperature: -40°F to 104°F
- Suitable for Wet Locations
- Rotatable Shroud with Set Screw
- 7-Year Warranty

Lighting:

- LED Type/Brand: Lumileds LEDs / SMD 3030
- Total Lumens: 2700LM and 3150LM
- Color Temperature: 3000K / 5000K
- Color Rendering Index: >82
- Beam Angle: 90° x 120°
- Lifespan: 70000 Hrs.

Applications:



- The fixture has classic traditional appearance, professional light distribution design, 90-degree beam angle, ideal for park landscaping, garden, architectural landscape lighting, suitable for wet locations

Other Models:


- 6W | 440LM | LF4-12V-6W-30K
- 12W | 1080LM | LF4-12V-12W-30K
- 24W | 2155LM | LF4-12V-24W-30K
- 50W | 4500LM | LF4-12V-50W-30K
- 6W | 500LM | LF4-12V-6W-50K
- 12W | 1260LM | LF4-12V-12W-50K
- 24W | 2500LM | LF4-12V-24W-50K
- 50W | 5250LM | LF4-12V-50W-50K



Photometrics: LF4-12V-30W



BUG Rating: B1-U1-G1

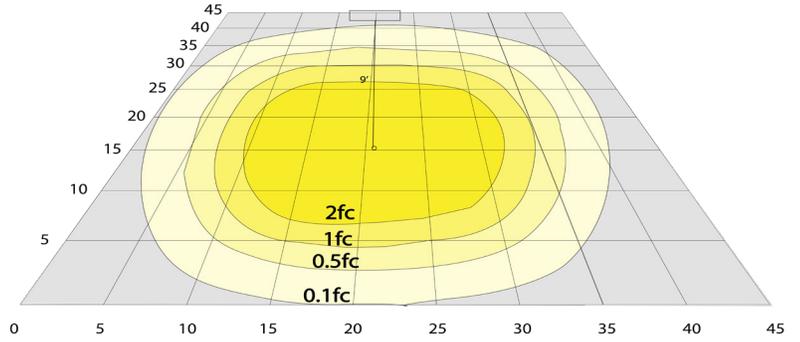

Area 45'x 45' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: LF4-12V-30W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LF4-12V-30W-30K	30W	12V	2700LM	3000K	B1-U1-G1	90
LF4-12V-30W-50K	30W	12V	3150LM	5000K	B1-U1-G1	105

Sample Ordering

Model	Volt	Watt	Color Temp.
LF4	12V	30W	30K = 3000K 50K = 5000K

Accessories:

- Blank = No Option For Accessories
- A-41-BR = 1/2" NPT Hub, Cast Aluminum, Bronze Powder Coat Finish
- LSWN1 = Bag of 24, Waterproof Wire Connectors, For Up to Two 14-2 + One 16-2 Cables
- LSWN2 = Box of 24, Waterproof Wire Connectors, For Up to Three 12-2 Cables
- LSWN2-100 = Jar of 100, Waterproof Wire Connectors, For Up to Three 12-2 Cables
- A-41-S = Tree Mounting Base
- LG-SMB-BZ = 12V Brass Landscape Tree or Surface Bracket, Antique Bronze Finish
- BC-13 = 13" Bungee Cords with Hooks
- BC-18 = 18" Bungee Cords with Hooks
- BC-24 = 24" Bungee Cords with Hooks
- BC-32 = 32" Bungee Cords with Hooks
- LF4-SH2 = Fits LF4-30W, LF4-12V-24W & 30W (Polycarbonate)

ACCESSORIES:



A-41-BR
1/2" NPT hub, Cast aluminum, Bronze Powder coat finish



LSWN1
Bag of 24, Waterproof wire connectors, for up to two 14-2 + one 16-2 cables



LSWN2
Box of 24, Waterproof wire connectors, for up to three 12-2 cables



LSWN2-100
Jar of 100, Waterproof wire connectors, for up to three 12-2 cables



A-41-S
Tree mounting base




LG-SMB-BZ
12V brass landscape tree or surface bracket, antique bronze finish



BC-13/18/24/32
13"/18"/24"/32" Bungee cords with hooks



LF4-SH2
Fits LF4-30W, LF4-12V-24W & 30W (Polycarbonate)



LF4-SH2
4 2/5" x 6 3/5"

Example:

- LF4-12V-30W-30K (For LF4 30W 30K Fixture 12V)
- LF4-12V-30W-30K LF4-SH2 (For LF4 30W 30K Fixture 12V) (Fits LF4-30W, LF4-12V-24W & 30W)

WESTGATE

Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com

