

### DESCRIPTION

The FXA series flood lights efficiently delivers bright, white light with robust performance. Lumen packages between 8900 and 50,000 lumens to fit all your project needs (See [FXA 15-45W](#) spec for lumens packages from 2000 to 5650 lumens). Its 100,000 hours rated life significantly decreases maintenance costs over the life of the fixture. The FXA has efficacies up to 137 lumens per watt and provides over 70% energy savings compared to HID technology is designed to illuminate landscaping, pathways, building facades, long docks and a wide variety of other outdoor areas needing flood lighting. The FXA is an ideal choice to maximize energy savings and utility rebates.

### SPECIFICATIONS

#### Construction:

- Die-cast aluminum housing in a powder coated finish
- UV stabilized polycarbonate lens
- Integral heat sink maximizes heat dissipation for longer LED life
- Vented housing isolated the driver from the LED compartment, maximizing heat dissipation and fixture life
- Driver compartment sealed with continuous silicone gasket
- Unit includes trunnion mount for 70W-200W models
- Slipfitter accessory available for 70W-200W models
- Yoke mount for 350W model

#### Optics/LEDs:

- UV-stabilized polycarbonate lens, wide NEMA distribution 7Hx6V (W), optional medium narrow NEMA 4Hx4V (MN) available for 135W-350W configurations
- 70W-350W LED models replace 250W-1000W HID for up to 70% energy savings
- Up to 50,000 lumens for a variety of applications (See [FXA 15-45W](#) spec for lumens packages from 2000 to 5650 lumens)
- Efficacies up to 137 LPW maximize energy savings and utility rebates
- Available in 4000K and 5000K CCT
- L70 >100,000 hours
- CRI ≥70

#### Electrical:

- Class 2 power supply, 120 to 277VAC, 50/60Hz
- 347/480VAC option (not available for 100W configuration)
- 1-10V dimming driver

#### Installation:

- Easy installation in new construction or retrofit applications
- Multiple mounting options available to suit your application trunnion (TR) and slipfitter (SF) mount for 70W to 200W
- Yoke mount (YK) for the 350W configuration

#### Options:

- Factory installed 120/277VAC button type photocontrol (PC)


#### Accessories:

- Button type universal photocontrol 120/277VAC (PCU)
- Slipfitter mount for 70W-200W (SF)

#### Additional Mounting Accessories:

- Quad 90° bullhorn mount (AXL2-80/280-BQ)
- Triple 120° bullhorn mount (AXL2-80/280-BT)
- Wall mount bracket (AXL2-80/280-W)
- Wall mount bracket, 90° (AXL2-80/280-W90)

Model: \_\_\_\_\_ Date: \_\_\_\_\_  
Accessories: \_\_\_\_\_  
Job Name: \_\_\_\_\_ Type: \_\_\_\_\_

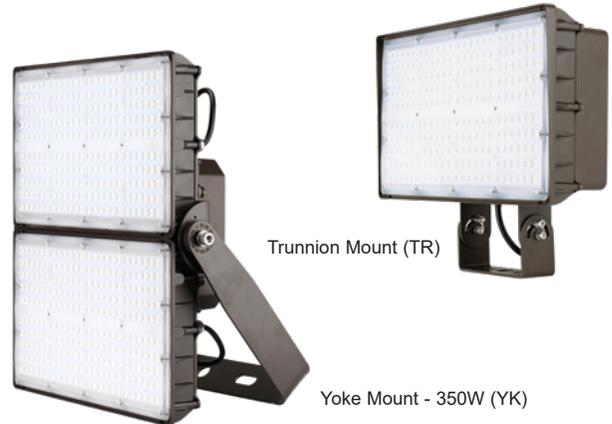

| Specs at a Glance*       |   |           |          |          |            |
|--------------------------|---|-----------|----------|----------|------------|
| Model                    | FXA-70  | FXA-100   | FXA-135  | FXA-200  | FXA-350    |
| <b>Wattage (W)*</b>      | 70W   | 100W      | 135W     | 200W     | 350W       |
| <b>Lumens (lm)</b>       | 8900  | 13,300    | 18,000   | 26,200   | 50,000     |
| <b>Efficacy (LPW)</b>    | 127   | 133       | 133      | 131      | 137        |
| <b>Equivalency (HID)</b> | 250W  | 250W-400W | 400W     | 400W     | 750W-1000W |
| <b>Distribution</b>      | Medium Narrow (4Hx4V), Wide (7Hx6V)                   |           |          |          |            |
| <b>Mounting</b>          | Trunnion, Slipfitter (Yoke - 350W Only)               |           |          |          |            |
| <b>CCT (K)</b>           | 4000K, 5000K  |           |          |          |            |
| <b>CRI</b>               | ≥70   |           |          |          |            |
| <b>Input Voltage</b>     | 120-277VAC, 50/60Hz, 347-480VAC Option, 1-10V Dimming |           |          |          |            |
| <b>Operating Temp</b>    | -40°C to 40°C (-40°F to 104°F)                        |           |          |          |            |
| <b>Certifications</b>    | cULus Listed for Wet Locations, DLC PREMIUM           |           |          |          |            |
| <b>Warranty</b>          | 5 Years   |           |          |          |            |
| <b>Weight*</b>           | 7.4 lbs   | 9.2 lbs   | 13.4 lbs | 14.4 lbs | 31.3 lbs   |

\* Nominal wattage. Tested at 5000K CCT. Values at 120/277VAC. See performance table for more detailed lumen information.

Note: Environment and application will affect performance. Typical values and 25°C used for testing. Specifications subject to change without notice.

#### Warranty:

- Five Year Warranty (Terms and Conditions Apply)

#### Testing & Compliance:

- cULus Listed for Wet Locations
- Tested to meet IP65 requirements
- Operating temperatures: -40°C to 40°C (-40°F to 104°F)
- DesignLights Consortium® (DLC) PREMIUM Qualified (verify QPL for specific models)

**Ordering Information** (Example: FXA-200-W-VS-5K-BR-TR)

See [FXA 15-45W](#) spec for lumens packages from 2000 to 5650 lumens

| Series | Wattage                      | Distribution                         | Input Voltage                 | CCT        | Finish      | Mount                  | Options (Factory Installed)                      |
|--------|------------------------------|--------------------------------------|-------------------------------|------------|-------------|------------------------|--|
| FXA    | 70 = 70 Watts                | MN <sup>2</sup> = Med Narrow (4Vx4H) | VS = 120-277VAC               | 4K = 4000K | BR = Bronze | TR = Trunnion          | PC = Button Photocontrol 120/277VAC              |
|        | 100 = 100 Watts              | W = Wide (7Vx6H)                     | HVS <sup>3</sup> = 347/480VAC | 5K = 5000K |             | YK <sup>4</sup> = Yoke |  |
|        | 135 = 135 Watts              |                                      |                               |            |             |                        | <b>Accessories<sup>5</sup></b> (Field Installed) |
|        | 200 = 200 Watts              |                                      |                               |            |             |                        | PCU = Button Photocontrol 120/277VAC             |
|        | 350 <sup>1</sup> = 350 Watts |                                      |                               |            |             |                        | FXA-SF = Slipfitter Mount ( for 70W-200W)        |

**Notes**

|   |  |
|---|--|
| <sup>1</sup> Only available with yoke mount   | <b>Additional Mounting Accessories<sup>5</sup></b> (Field Installed) |
| <sup>2</sup> Only available for 135W-350W configurations  | AXL2-80/280-BQ = Quad 90° Bullhorn Mount                             |
| <sup>3</sup> Not available for 100W configuration   | AXL2-80/280-BT = Triple 120° Bullhorn Mount                          |
| <sup>4</sup> Yoke mount available for 350W model only   | AXL2-80/280-W = Wall Mount Bracket                                   |
| <sup>5</sup> Order as a separate line item. Shipped in a separate box for final installation in the field | AXL2-80/280-W90 = Wall Mount Bracket, 90°                            |

**Performance**

| Model            | Wattage (W) | CCT   | Distribution          | Lumen Output | Efficacy (LPW) | CRI | Equivalency (HID) |
|------------------|-------------|-------|-----------------------|--------------|----------------|-----|-------------------|
| FXA-70-W-VS-4K   | 70W         | 4000K | Wide (7Vx6H)          | 8900         | 127            | 70  | 250W              |
| FXA-70-W-VS-5K   | 70W         | 5000K | Wide (7Vx6H)          | 8900         | 127            | 70  |                   |
| FXA-100-W-VS-4K  | 100W        | 4000K | Wide (7Vx6H)          | 13300        | 133            | 70  | 250W-400W         |
| FXA-100-W-VS-5K  | 100W        | 5000K | Wide (7Vx6H)          | 13300        | 133            | 70  |                   |
| FXA-135-MN-VS-4K | 135W        | 4000K | Medium Narrow (4Vx4H) | 18000        | 133            | 70  | 400W              |
| FXA-135-MN-VS-5K | 135W        | 5000K | Medium Narrow (4Vx4H) | 18000        | 133            | 70  |                   |
| FXA-135-W-VS-4K  | 135W        | 4000K | Wide (7Vx6H)          | 18000        | 133            | 70  |                   |
| FXA-135-W-VS-5K  | 135W        | 5000K | Wide (7Vx6H)          | 18000        | 133            | 70  |                   |
| FXA-200-MN-VS-4K | 200W        | 4000K | Medium Narrow (4Vx4H) | 26500        | 133            | 70  | 400W              |
| FXA-200-MN-VS-5K | 200W        | 5000K | Medium Narrow (4Vx4H) | 26500        | 133            | 70  |                   |
| FXA-200-W-VS-4K  | 200W        | 4000K | Wide (7Vx6H)          | 26200        | 131            | 70  |                   |
| FXA-200-W-VS-5K  | 200W        | 5000K | Wide (7Vx6H)          | 26200        | 131            | 70  |                   |
| FXA-350-MN-VS-4K | 350W        | 4000K | Medium Narrow (4Vx4H) | 49500        | 141            | 70  | 750W-1000W        |
| FXA-350-MN-VS-5K | 350W        | 5000K | Medium Narrow (4Vx4H) | 50000        | 143            | 70  |                   |
| FXA-350-W-VS-4K  | 350W        | 4000K | Wide (7Vx6H)          | 49500        | 141            | 70  |                   |
| FXA-350-W-VS-5K  | 350W        | 5000K | Wide (7Vx6H)          | 50000        | 143            | 70  |                   |

**Slipfitter Accessory**




For 2 3/8" O.D. Pipe

**Sample Photometry**


**FXA-200-W-VS-5K**

IES: TYPE I Very Short  
 MOUNTING HEIGHT: 10'  
 TILT: ZERO  
 HORIZONTAL SPACING CRITERIA: 1.14


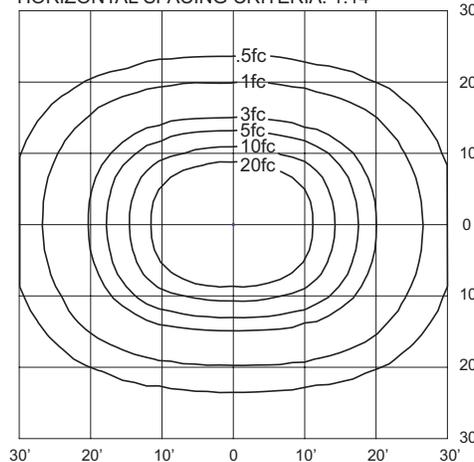


**FXA-200-MN-VS-5K**

IES: TYPE VS Very Short  
 MOUNTING HEIGHT: 10'  
 TILT: ZERO  
 HORIZONTAL SPACING CRITERIA: 0.44

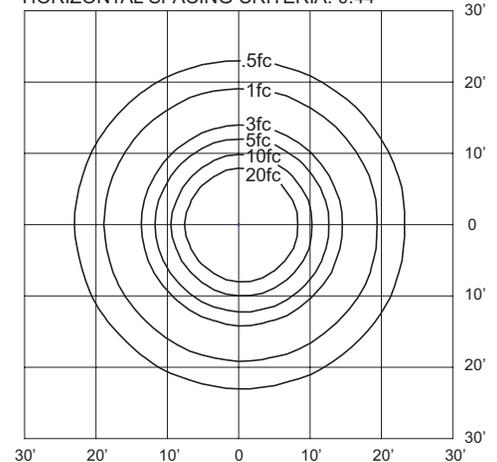


**Fixture EPA Values**


|                  |   |   |   |   |   |
|------------------|---|---|---|---|---|
|                  |  |  |  |  |  |
| <b>Model</b>     | 1   | 2 @ 90°   | 2 @ 180°  | 3 @ 90°   | 4 @ 90°   |
| <b>70W/100W</b>  | 0.2885  | 0.6097  | 0.577   | 0.8982  | 0.8982  |
| <b>135W/200W</b> | 0.3868  | 0.8125  | 0.7736  | 1.1993  | 1.1993  |
| <b>350W</b>      | 0.536   | 1.061   | 1.072   | 1.597   | 1.597   |

**Dimensions**


**70W & 100W**

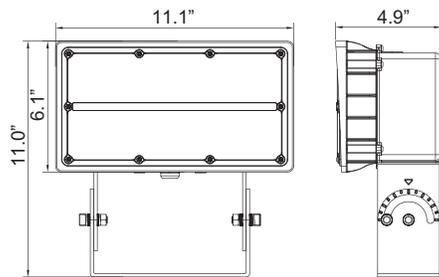


**135W & 200W**

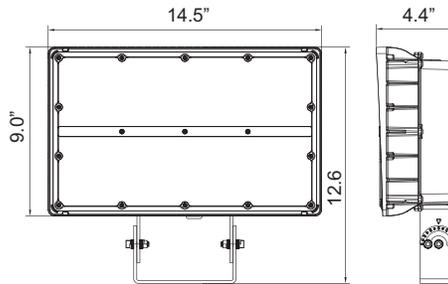


**350W**

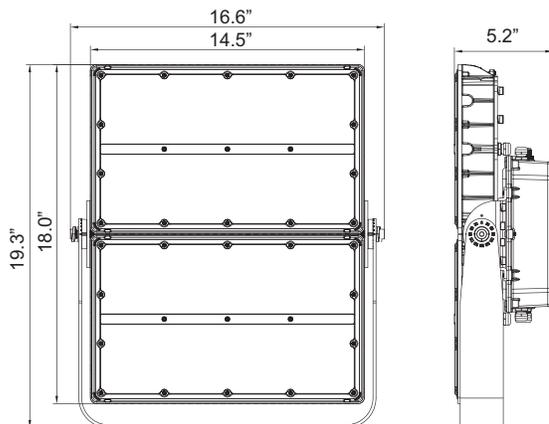


**Additional Accessories and Mounts**

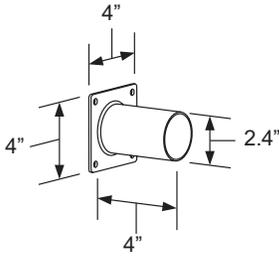


**Wall Mounting Bracket**  
AXL2-80/280-W

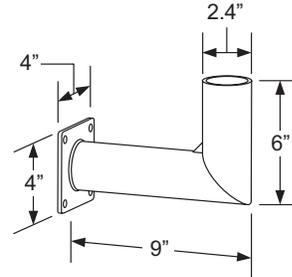

**90° Wall Mounting Bracket**  
AXL2-80/280-W90

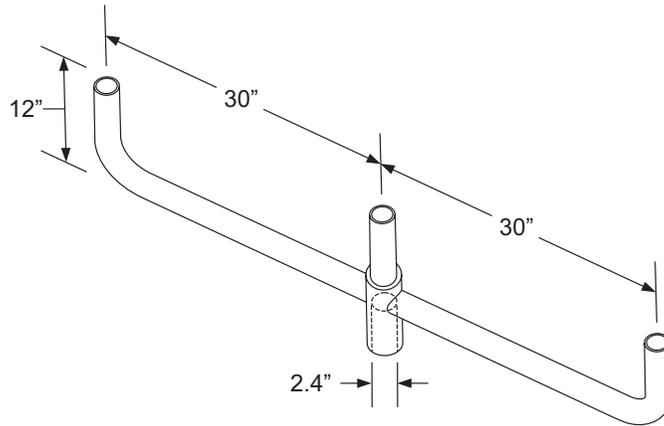

**Triple 180° Bullhorn Mounting Bracket**  
AXL2-80/280-BT  
EPA Value = 1.7 square feet

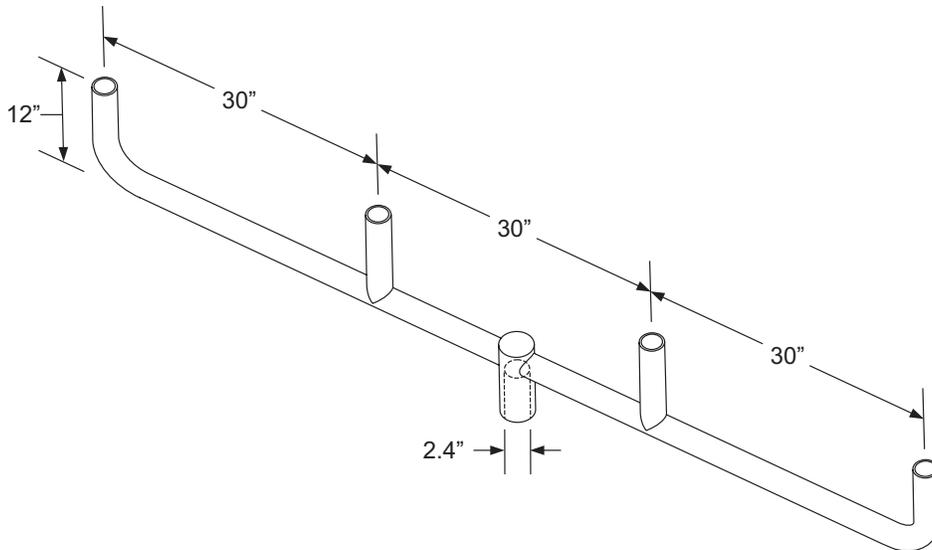

**Quadruple 180° Bullhorn Mounting Bracket**  
AXL2-80/280-BQ  
EPA Value = 2.7 square feet