

| Model: | Date: |
|--------------|-----------|
| Accessories: | |
| Job Name: | Type: |

VARIUS LED Series

90W Blue Spectrum LED Linear Grow Light

FEATURES

- Broad spectrum white LED with enhanced blue spectral performance ideal for clone, mother and vegetative cycles
- Each VARIUS LED bar is supplied with a pre-wired, on-board driver and quick-connect cable system
- Powerful magnets allow the VARIUS LED to attach directly to pallet rack frames for easy adjustment of bar spacing to customize light intensity and uniformity
- Optional AC supply harness (AG-8-H) for simplified wiring of up to eight bars
- Optional mounting frame (AG-FRAME) offers customizable spacing and spectrum blending, allowing adjustability for any mounting application
- · Listed to UL8800

SPECIFICATIONS

| Number of Bars | Single Bar* | 8 Bars** |
|------------------------------------|-------------------------------|----------|
| PPF (400-700nm) μmol/s | 181 | 1,480 |
| PPF Efficacy (400-700nm) μmol/J | 2.0 | |
| Lumens | 11,950 | 95,600 |
| CRI | ≥ 87 | |
| Mounting Height | 12" to 36" | |
| Power Consumption | 90W | 720W |
| Input Voltage | 120-277 VAC | |
| Amps @ 120V | 0.75A | 6.0A |
| Amps @ 240V | 0.38A | 3.0A |
| Amps @ 277V | 0.33A | 2.7A |
| Operating Frequency | 50/60Hz | |
| Operating Temperature | -20°C to 40°C (-4°F to 104°F) | |
| Dimming | 1-10V | |
| Environment | Damp Location | |
| Power Factor (PF) | ≥ .98 | |
| Certifications | ETL / UL8800 | |

^{*} Single Bar mounted 18" above canopy.

OTHER SPECTRUMS


- Full-Spectrum AG90-W-001
- Red Spectrum AG90-R-001









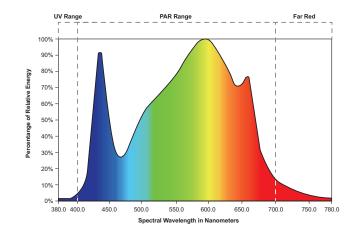

ORDERING INFORMATION

| Example: AG90-B-001 | | |
|----------------------|--|--|
| Series/Configuration | Description | |
| AG90-B-001 | LED Light Bar, Blue Veg Spectrum, 90W, 120-277VAC Input, 1-10V Dimming, Black Extrusion w/Blue End Caps and Driver Connectors, 120VAC Straight Blade Line Cord | |

| Accessories *Order as separate line item for final installation in the field | | | | |
|--|---|--|--|--|
| AG-240-LC | 240VAC Straight-blade (NEMA 6-15P) Line Cord, 5' Length, for use with AG90 Bars or AC Supply Harness | | | |
| AG-277-L-LC | 277VAC Twist-lock (NEMA L7-15P) Line Cord, 5' Length, for use with AG90 Bars or AC Supply Harness | | | |
| AG-8-H | Multi-port, 16AWG, AC Supply Harness for Linking up to Eight (8) Bars | | | |
| AG-FRAME | 2'x4' Mounting Frame | | | |

*Consult factory for additional accessories



^{**} Typical Veg Application with eight (8) AG90-B bars spaced 6" apart and mounted 24" above canopy.

ON-BOARD DRIVER



STANDARD MAGNET MOUNT



INCLUDED SAFETY CABLE




ACCESSORIES

2'x4' AG-FRAME



AG-8-H-8 BAR CONNECTOR



AG-240-LC 240VAC CORD W/ PLUG




AG-277-L-LC-277VAC CORD W/ PLUG



RACK DETAIL ILLUSTRATING MAGNET MOUNTING



DIMENSIONS



WEIGHTS

| Model | Unit | Packaged Weight |
|------------|------------------|------------------|
| AG90-B-001 | 4.8 lbs (2.2kgs) | 5.2 lbs (2.6kgs) |