


CATALOG NUMBER: E-SCA00W430 FOR ONE 430 WATT, S145 HIGH PRESSURE SODIUM LAMP

Line Voltage	120/208/240/277V
Regulation	
Line Volts	+/-10%
Lamp Watts	WITHIN TRAPEZOID
Frequency	60 Hz
Circuit Type	CWA
Power Factor (min)	90%
Insulation Class	H(180°)
Min. Ambient Starting Temp.	-40° F or -40° C

Line Voltage (Volts)	120	208	240	277
Line Current (Amps)				
Operating	4.0	2.3	2.0	1.73
Open Circuit	2.1	1.16	1.05	0.90
Starting	3.40	1.94	1.71	1.47
Input Watts (W)	470	470	470	470
Open Circuit Voltage (V)	190	190	190	190
Drop Out Voltage (V)	85	145	170	195
UL(1029) Bench Top Rise	B	B	B	B
Recommended Fuse (Amps)	10	8	5	5
HIGH POTENTIAL TEST (VOLTS)				
1 Minute	2000			
2 Seconds	2500			
Open Circuit Voltage Test(volts)	170-210			
Short-Circuit Current Test (Amps)				
Secondary Current	5.7 - 6.5			
Input Current (Amps)	3.1 -	1.80 -	1.54 -	1.34 -
	3.4	1.96	1.70	1.48

BRACKET CORE & COIL MOUNTING BRACKET

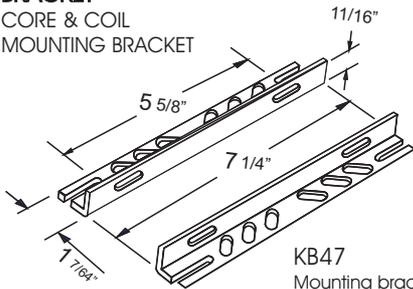

KB47
Mounting bracket for
Core & Coil Ballasts
(2 brackets with thru bolts)




C-01
MOUNTING CLIP for round
case (Furnished as standard
with B suffix ballast)



I-01
MOUNTING CLIP for oval
case (Furnished as standard
with B suffix ballast)


4 1/4" x 4 3/4" CORE

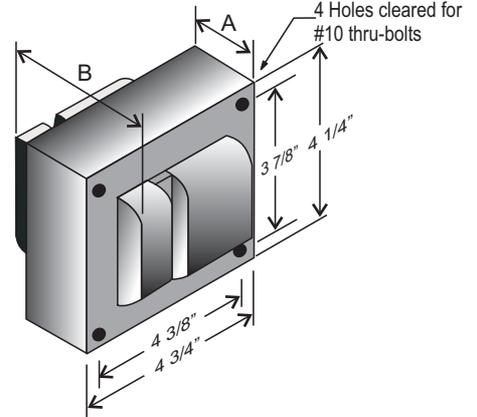

CORE AND COIL

Dimension A (inches)	2.30
Dimension B (inches)	4.00
Weight (Lbs)	14.6
Lead Lengths (inches)	12


CAPACITOR



RATING
52 Mfd ± 3%
240 VAC MIN
Dry Film Capacitor
Thermal Plastic Case
Max. Case Temp 100° C
NO PCB'S


IGNITOR 37-63-AS-6.9-N6

Ballast to Lamp Distance (BTL): 2 feet



(THERMAL PLASTIC CASE)
Max. case Temp: 110° C

WIRING DIAGRAM

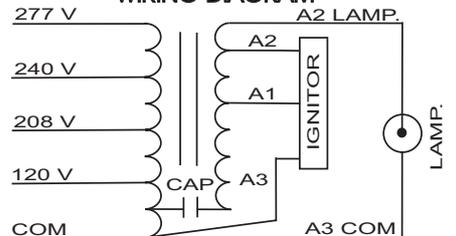

120/208/240/277 VOLT CONNECTION

ORDERING INFORMATION

*** Add proper suffix to catalog number when ordering as indicated below:

- No suffix = Core and Coil Only
- B = Core and Coil, and Bracket
- C = Core and Coil, and Capacitor
- BC = Core and Coil, Capacitor and Bracket

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual Performance can vary depending on operating conditions. Specifications are subject to change without notice.

ISO 9001:2000



Made in Mexico by Industrias Sola Basic S.A de C.V.