


CATALOG NUMBER: E-SCA00W750 FOR ONE 750 WATT, S111 HIGH PRESSURE SODIUM LAMP

Line Voltage	120/208/240/277V
Regulation	
Line Volts	+/-10%
Lamp Watts	WITHIN TRAPEZOID
Frequency	60 Hz
Circuit Type	CWA
Power Factor (min)	90%
Insulation Class	H(180°)
Min. Ambient Starting Temp.	-40° F or -40° C

Line Voltage (Volts)	120	208	240	277
Line Current (Amps)				
Operating	6.8	4.0	3.5	3.1
Open Circuit	4.60	2.55	2.25	1.90
Starting	5.50	3.20	2.75	2.40
Input Watts (W)	800	800	800	800
Open Circuit Voltage (V)	220	220	220	220
Drop Out Voltage (V)	70	115	135	160
UL(1029) Bench Top Rise	B	A	B	B
Recommended Fuse (Amps)	20	10	10	10
HIGH POTENTIAL TEST (VOLTS)				
1 Minute	2000			
2 Seconds	2500			
Open Circuit Voltage Test(volts)	200-245			
Short-Circuit Current Test (Amps)				
Secondary Current	9.0 - 10.5			
Input Current (Amps)				
	4.0 -	2.25 -	1.95 -	1.70 -
	5.5	3.10	2.70	2.35


4 1/4" x 6" CORE

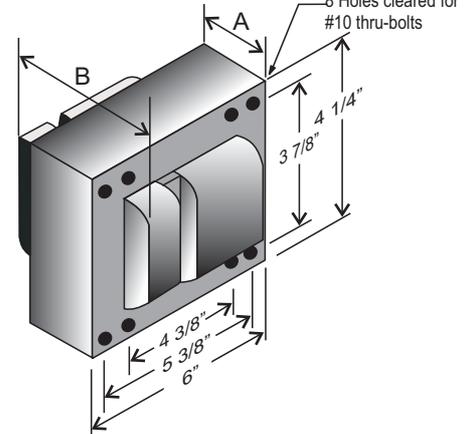

CORE AND COIL


Dimension A (inches)	3.20
Dimension B (inches)	5.20
Weight (Lbs)	25.5
Lead Lengths (inches)	12

2 CAPACITOR SET

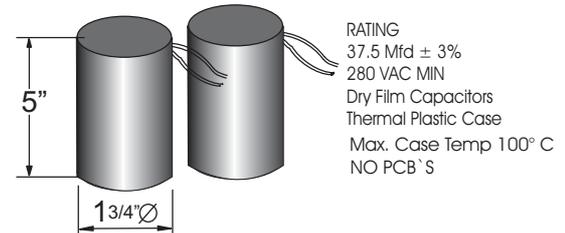


IGNITOR 356-AS-7.9

Ballast to Lamp Distance (BTL): 5 feet

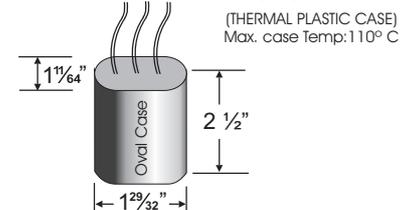

BRACKET

CORE & COIL
MOUNTING BRACKET

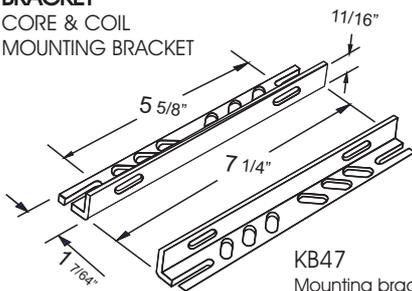

KB47
Mounting bracket for
Core & Coil Ballasts
(2 brackets with thru bolts)



C-01
MOUNTING CLIP for round
case (Furnished as standard
with B suffix ballast)



I-01
MOUNTING CLIP for oval
case (Furnished as standard
with B suffix ballast)

ORDERING INFORMATION

*** Add proper suffix to catalog number when ordering as indicated below:


- No suffix = Core and Coil Only
- B = Core and Coil, and Bracket
- C = Core and Coil, and Capacitor
- BC = Core and Coil, Capacitor and Bracket

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual Performance can vary depending on operating conditions. Specifications are subject to change without notice.

ISO 9001:2000



WIRING DIAGRAM

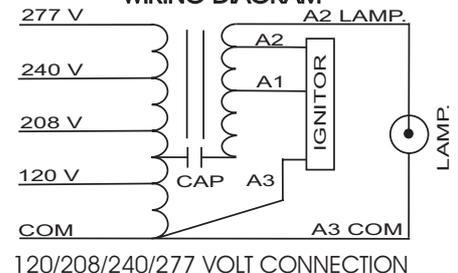

Made in Mexico by Industrias Sola Basic S.A de C.V.