

## CATALOG NUMBER: E-SSCA00W250 FOR ONE 250 WATT, S50 HIGH PRESSURE SODIUM LAMP


Line Voltage	120/208/240/277V
Regulation	
Line Volts	+/-10%
Lamp Watts	WITHIN TRAPEZOID
Frequency	60 Hz
Circuit Type	CWA
Power Factor (min)	90%
Insulation Class	H(180°)
Min. Ambient Starting Temp.	-40° F or -40° C

Line Voltage (Volts)	120	208	240	277
Line Current (Amps)				
Operating	2.5	1.5	1.3	1.1
Open Circuit	1.37	0.85	0.69	0.60
Starting	1.80	1.05	0.90	0.78
Input Watts (W)	295	295	295	295
Open Circuit Voltage (V)	185	185	185	185
Drop Out Voltage (V)	80	140	160	184
UL(1029) Bench Top Rise	B	B	A	A
Recommended Fuse (Amps)	7	4	4	3

HIGH POTENTIAL TEST (VOLTS)					
1 Minute	2000				
2 Seconds	2500				
Open Circuit Voltage Test (volts)	175-210				
Short-Circuit Current Test (Amps)					
Secondary Current	4.0 - 4.5				
Input Current (Amps)		1.60 - 1.80	0.92 - 1.05	0.80 - 0.90	0.69 - 0.80

### BRACKET

CORE & COIL  
MOUNTING BRACKET

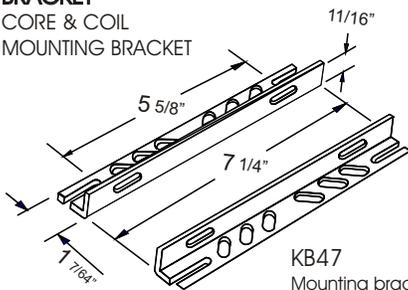

**KB47**  
Mounting bracket for  
Core & Coil Ballasts  
(2 brackets with thru bolts)




**C-01**  
MOUNTING CLIP for round  
case (Furnished as standard  
with B suffix ballast)



**I-01**  
MOUNTING CLIP for oval  
case (Furnished as standard  
with B suffix ballast)


### 4 1/4" x 4 3/4" CORE

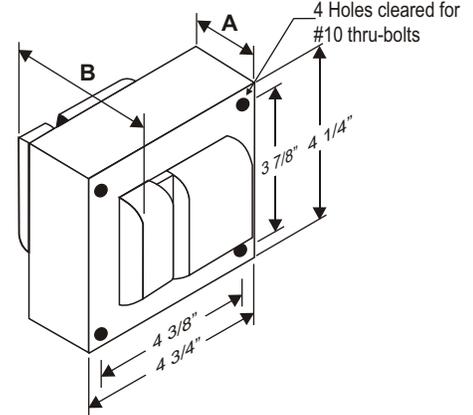

### CORE AND COIL

Dimension A (inches)	2.0
Dimension B (inches)	3.8
Weight (Lbs)	12.4
Lead Lengths (inches)	12


### CAPACITOR



**RATING**  
35 Mfd ± 3%  
240 VAC MIN  
Dry Film Capacitor  
Thermal Plastic Case  
Max. Case Temp 100° C  
NO PCB'S


### IGNITOR 37-63-AS-6.9-N6

Ballast to Lamp Distance (BTL): 2 feet



(THERMAL PLASTIC CASE)  
Max. case Temp: 110° C

### WIRING DIAGRAM

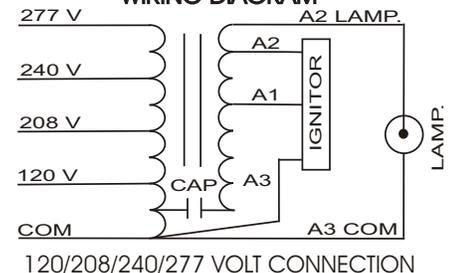

## ORDERING INFORMATION

\*\*\* Add proper suffix to catalog number when ordering as indicated below:

No suffix = Core and Coil Only

B= Core and Coil, and Bracket

C=Core and Coil, and Capacitor

BC=Core and Coil, Capacitor and Bracket

Data is based upon tests performed by Industrias Sola Basic in a controlled environment and representative of relative performance. Actual Performance can vary depending on operating conditions. Specifications are subject to change without notice.



Made in Mexico by Industrias Sola Basic S.A de C.V.