

PROJECT: _____
 CATALOG #: _____
 FIXTURE TYPE: _____
 NOTES: _____

HX High Bay Extreme Gen 1



The industrial strength *HX Extreme High Bay Series G1* has the highest lumen output of all SLG's round high bays. This innovative luminaire with precise optical control and heat radiating fins for superior thermal management is ideally suited for the most challenging applications. More precision can be added with the Field Adjustable Output, an accessory to set the default lumen output and wattage to meet specific project needs and increase the lifespan of each luminaire. Motion sensors can be added for greater energy savings and intelligent control for motion detection and daylight harvesting. Additional options include SLG's Bluetooth wireless control system for improved user experience and control.

APPLICATIONS

Commercial, Retail, Industrial, and Institutional applications, etc.

REPLACEMENT

750W - 1000W HID

PERFORMANCE INFORMATION

SERIES NUMBER	WATT	LUMENS	CCT
HX 320 WD G1 4K	200W	32,000	4000K
HX 390 WD G1 4K	250W	39,000	4000K
HX 480 WD G1 4K	300W	48,000	4000K
HX 540 WD G1 4K	340W	54,000	4000K



EL UNV-16W
Emergency Battery Kit

ORDERING GUIDE						EXAMPLE: HX 320 WD G1 4K
Luminaire Type	Lumen Output	Beam Angle	Generation	Voltage	CCT	Finish
HX High Bay Extreme	320 32,000 LM - 200 W	WD= 120° Lens	G1	BLANK= 120-277V HVU 347-480V	4K 4000K 5K 5000K	BLANK= Dark Bronze
	390 39,000 LM - 250 W					
	480 48,000 LM - 300 W					
	540 54,000 LM - 340 W					
OPTIONS						
Individual Control		Cord Sets				
MS-FSP-211 =Fixture Integrated PIR Outdoor Motion/Photo sensor, 120/277V AC, 1-10V Adjustable Dimmer Select L3 or L7 Depending On Mount Height MS-FSP-L3 =L3-360° lens, maximum coverage 40' diameter from 20' height. MS-FSP-L7 =L7-360° lens, maximum coverage 100' diameter from 40' height MS-FSIR-100 = Wireless commissioning tool EL UNV-16W = Emergency Battery Kit		Cords Standard 3ft power cord, 18 gauge with 3 conductors C51 6 ft power cord, Straight Cord, 18 gauge, 3 conductors, Black, Voltage will match fixture C52 6 ft power cord, Twist-Lock Plug Type, 3 conductors, Black, Optional with L5-15P, L5-20P, L6-15P, L7-15P, L7-20P, L8-20P. Gauge and voltage will match fixture. (Please confirm with SLG Sales before placing the order) C53 6 ft power cord, 12 Gauge, 3 conductors, MC Solid Cable, No Plug, Voltage will match fixture C54 6 ft power cord, 16 Gauge, 3 conductors, SO Black Cord, No Plug, Voltage will match fixture C55 6 ft power cord, 18 Gauge, 5 conductors (Bring dimming leads out of fixture), Black cord, No Plug, Voltage will match fixture				

Due to continuous product improvements, specification and/or equipment updates may change without notice.

SPECIFICATIONS

HOUSING

Sealed die-cast aluminum housing with multiple heat sinks for maximum heat management.

AMBIENT TEMPERATURE

200W/300W: -40°C to 65°C (-40°F to 149°F)
250W/340W: -40°C to 55°C (-40°F to 131°F)

MOUNTING

Standard Hook mounting or optional 3/4 inch Conduit Pendant mount

EFFICACY

More than 156 lumens per watt (see individual wattage data)

CCT AND CRI

4000 and 5000K CCT available; 70CRI

OPTICS

Temperature resistant designed lens for maximum luminous flux output

LENS

Impact-resistant polycarbonate lens.

WARRANTY

10-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

ELECTRICAL

Standard 50/60Hz operation with 120-277V input. 347/480V line voltage with Standard 1-10V dimming.

ENERGY DATA

Power Factor above 90%.



FINISH

Polyester Powder Dark Bronze Finish

CERTIFICATIONS

UL Listed for wet locations, IP65 Rating. Design Lights Consortium® (DLC) Standard 5.1 qualified product. Not all versions of this product may be DLC qualified. Please visit www.slgus.com to confirm which versions are qualified.

DIMENSIONS

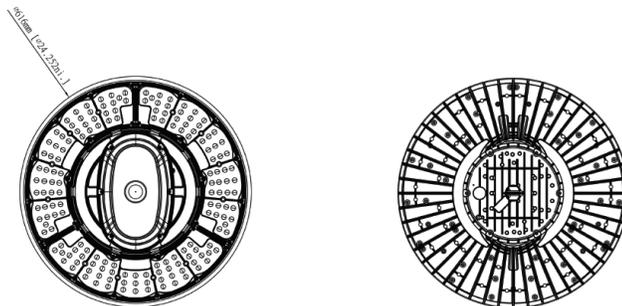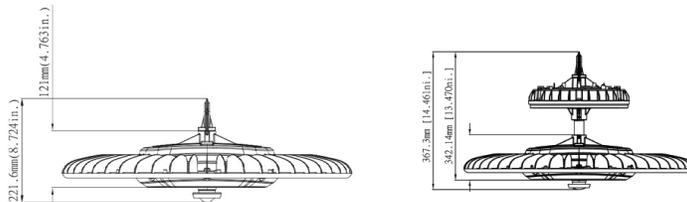

WEIGHT

200W/250W: 16.27Lb
 300W/340W: 17.57Lb

Due to continuous product improvements, specification and/or equipment updates may change without notice.

ACCESSORY & OPTIONS

Field Adjustable Output



The Field Adjustable Output is a new accessory that can change the input wattage and lumen output to meet specific needs. This dial can set default brightness for each luminaire. Operation can be completed in the factory or the field during installation and maintenance.

This accessory is ideal for customers who are looking for more control over their lumen output or wish to adjust depending on the project.



MS-FSP-211
Dimmable Motion Sensor



MS-FSP-L3/L7
Lens


The **MS-FSP-211** provides multi-level control based on motion and daylight level. Requires L3 or L7 lens depending on the mounting height.

Operation Voltage	Shape	Adjustable Time Delay	Fade Down Time	Operating Temperature	Mounting Height For MS-FSP-L3	Mounting Height For MS-FSP-L7
120/277V	Cone	30 sec - 30 min	0-10 sec	-40°F to 158°F	20 ft*	40 ft**

* Covers a 40 ft diameter when mounting height is 20 ft. Coverage is equal to 2x the height.

** Covers a 100 ft diameter when mounting height is 40 ft. Coverage is equal to 2.5x the height

PHOTOMETRIC

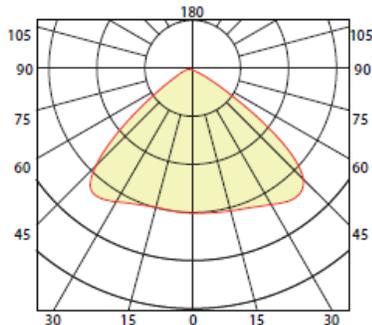

Due to continuous product improvements, specification and/or equipment updates may change without notice.

PERFORMANCE COMPARISON

Product Series	Wattage	4000K & 5000K		Voltage	Replaces	Temperature
		Lumens	Efficacy (LPW)			
HX 320 WD G1 4K	200W	32,000 Lm	160 lm/W	120-277V	750W HID	-40°C to 65°C (-40°F to 149°F)
HX 390 WD G1 4K	250W	39,000 Lm	156 lm/W	120-277V	750W HID	-40°C to 55°C (-40°F to 131°F)
HX 480 WD G1 4K	300W	48,000 Lm	160 lm/W	120-277V	750W HID	-40°C to 65°C (-40°F to 149°F)
HX 540 WD G1 4K	340W	54,000 Lm	159 lm/W	120-277V	1000W HID	-40°C to 55°C (-40°F to 131°F)

ELECTRICAL LOAD

Series Number	Wattage	Current (A)					
		120V	208V	240V	277V	347V	480V
HX 320 WD G1 4K	200W	1.67	0.96	0.83	0.72	0.58	0.42
HX 390 WD G1 4K	250W	2.08	1.20	1.04	0.90	0.72	0.52
HX 480 WD G1 4K	300W	2.50	1.44	1.25	1.08	0.86	0.63
HX 540 WD G1 4K	340W	2.83	1.63	1.42	1.23	0.98	0.71

Due to continuous product improvements, specification and/or equipment updates may change without notice.