









COMPATIBLE TRIMS

13100 | 13100R

Trim	Ordering Info	Dimensions	Specifications
	BAFFLE • 50W 120V MR-16 13002BK Black (white ring) 13002OB-ABZ Oil-rubbed bronze (aged bronze ring) 13002OB-OB Oil-rubbed bronze (oil-rubbed bronze ring) 13002WH White (white ring)		
	RIBBED REFLECTOR • 50W 120V MR-16 13003WH White		
	GIMBAL RING • 50W 120V MR-16 13007BK Black 13007CH Chrome 13007OB Oil-rubbed bronze 13007WH White		
	SLOTTED APERTURE • 50W 120V MR-16 13008BK Black 13008WH White		

3" LINE VOLTAGE

DLR3

3" LED RECESSED DOWNLIGHT

Part of NICOR's D-Series, the DLR3 combines price, performance and design all in one package.



For more information about our LED series, visit us online at www.nicorlighting.com

Specifications subject to change without notice. Please refer to our website for the most current information.

Suitable for new construction in residential and commercial applications.
IC rated. Suitable for direct contact with insulation.

JUNCTION BOX

Listed for through branch circuit wiring and includes several 1/2" knockouts. Four pry-outs with integral strain relief simplify Romex installation. Supplied with three push-in wire connectors.

HANGER BARS

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span. Unique hanger bar lip design helps align can to joist. Four double-headed captive nails provide for ease of installation. Bars can be repositioned 90° on plaster frame without tools. Bars fit onto T-bar spine for quick alignment and can be permanently secured. Score lines allow bars to be shortened without tools to accommodate a 12" joist span.

HOUSING


Aluminum construction provides greater heat dissipation. Transformer includes integral thermal protector guards against improper lamping and misuse of insulation materials. Use low voltage 20W - 50W MR-16 or JC type lamps (12V) (not included). Use dimmers specifically designed for low voltage magnetic transformers. 7 1/4" height allows use in 2"X8" joist construction.

PLASTER FRAME

Housing is secured to plaster frame with screws and can be removed for access to junction box. Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

13102

3" UNIVERSAL HOUSING IC-RATED

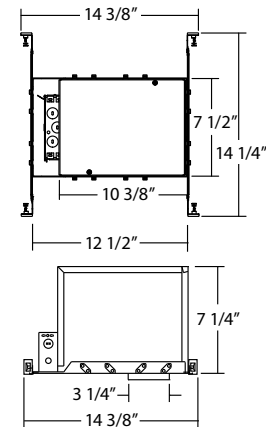

ORDERING INFORMATION









Example: 13102

Series	Version
13102	3" Universal housing IC-Rated



COMPATIBLE TRIMS

13000 | 13000R | 13102

Trim	Ordering Info	Dimensions	Specifications
	BAFFLE • 50W 12V MR-16 13002BK Black (white ring) 13002OB-ABZ Oil-rubbed bronze (aged bronze ring) 13002OB-OB Oil-rubbed bronze (oil-rubbed bronze ring) 13002WH White (white ring)		
	RIBBED REFLECTOR • 50W 12V MR-16 13003WH White		
	GIMBAL RING • 50W 12V MR-16 13007BK Black 13007CH Chrome 13007OB Oil-rubbed bronze 13007WH White		
	SLOTTED APERTURE • 50W 12V MR-16 13008BK Black 13008WH White		

Specifications subject to change without notice. Please refer to our website for the most current information.