



Performance Specification

Class P

No PCB's

Type 1 Outdoor


Sound Rated Class A

High Power Factor

BB-T8/UVH-4X32/HPF	
Ballast Type	Electronic
Starting Method	Instant Start
Lamp Connection	Parallel
Input Voltage	120V-277V
Input Frequency	50/60Hz


Lamp Type	Num.of Lamps	Lamp Watts	Min.Start Temp	Input Current	Input Power	THD	Power Factor	Lamp Current Crest Factor
F32T8	4	32	-18□	1.07A/0.47A	108~116W	<10%	≥0.99	<1.7
F25T8	4	25	-18□	0.84A/0.37A	92-110W	<10%	≥0.99	<1.7
F17T8	4	17	-18□	0.57A/0.25A	65-78W	<10%	≥0.99	<1.7
F32T8	3	32	-18□	0.81A/0.35A	84-96W	<10%	≥0.99	<1.7

Wiring Diagram

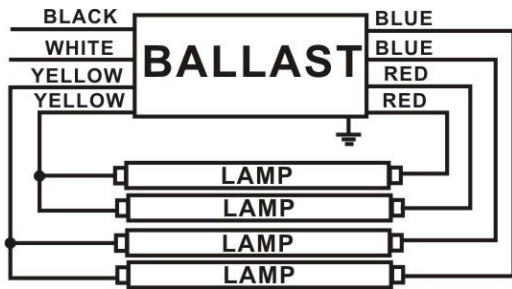

	mm
Blackx1	460
Whitex1	460
Redx1	620
Bluex2	620
Yellowx2	920

Case

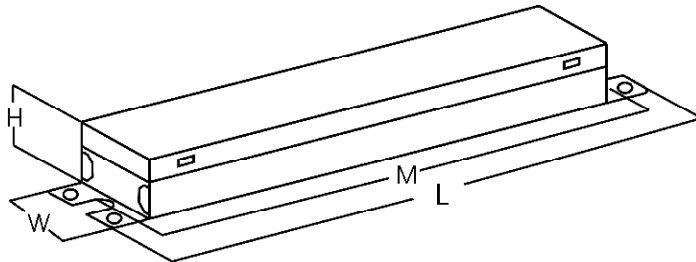

Overall(L)	Width(W)	Height(H)	Mounting(M)
242mm	43mm	36mm	211mm

