


CL SERIES

INFO SHEET


These slim surface mount lights are perfect for stairwells and passageways, low bay lighting parking garages, and under canopies. The CL Series is available with a standard flat tempered glass lens or an optional tamper proof polycarbonate drop lens.



Flat Tempered Glass Lens

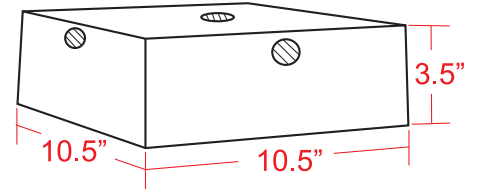

Polycarbonate Drop Lens

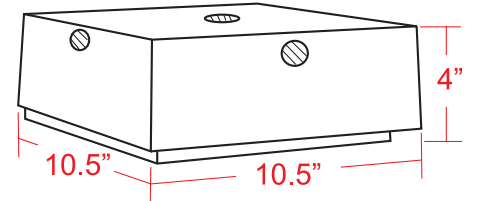

PRODUCT HIGHLIGHTS

- Heavy Duty LEDs
- Unique optic design to increase light spread
- Die cast aluminum housing with durable powder coat
- Slim, surface mounted design for simple installation
- Flat, tempered glass or tamper proof polycarbonate lens options
- "Hands-free" wiring with knockouts on sides and top
- Compatible with 0-10V dimming controls
- Compatible with many photocells and motion sensors
- ETL rated for wet locations

PRODUCT SPECIFICATIONS

FAMILY		INPUT	POWER	LUMENS	CCT	CRI	PF
CL	100	120-277V 50/60Hz	28W	2,998 lm	5000K	≥ 80	≥ 0.99
	175	120-277V 50/60Hz	43W	4,228 lm	5000K	≥ 80	≥ 0.99
	250	120-277V 50/60Hz	58W	5,302 lm	5000K	≥ 80	≥ 0.99

ORDERING CHART

product family	wattage/equivalent		lens	
CL	100	100W equivalent (28W LED)	G	Glass
	175	175W equivalent (43W LED)	P	Polycarbonate
	250	250W equivalent (58W LED)		



Intertek



includes labor allowance