## **Specification Sheet**

## FB32T8/841/6

**T8 U-Bent Linear Fluorescent Lamp** 

32 Watt / 85 CRI / 4100K




9/5/2013

A B

		Approve	ed by:	
Ordering Information				
	Howard Catalog Number (Ordering Code)		FB32T8/841/6	
UPC Code			02264	
			T8 U-Sho	aped, 6" Spacing, Low
Description	Description		Mercury Linear Fluorescent	
Package Qu	Package Quantity		20	
Physical Characteristics				
Base	Base		Medium Bipin	
Bulb Type	Bulb Type		T8 (8/8 inch)	
Bulb Descrip	Bulb Description		Tubular Fluorescent Lamp	
Base face to	Base face to base face (A) (in)		23	
Base face to	Base face to end of opposite base pin (B) (in)		23	
End of base pin to end of the oppo end (C) (in)		pin	6	
Operating C	haracteristics			
Nominal Wat	ttage		32	
C Approximate	Initial Lumen (Im)		3000	
Approximate Mean Lumen (Im)			n/a	
Average Rated Life (hours)			24000	
Color Tempe	Color Temperature (K)		4100	
Color Rendering Index (CRI)			85	

Project:

Catalog#:

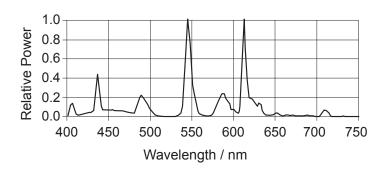



Note: Rated lamp life is 24,000 hours based on 3 hours per start and 30,000 hours based on 12 hours per start. Lamp life will be affected when using occupancy sensors, dimmers or dimming systems. These products are Low-Mercury fluorescent lamps and pass the Federal TCLP for hazardous waste. Disposal regulations may vary; check local and state regulations.

Specifications subject to change without notice.

Howard Lighting Products | 580 Eastview Drive | Laurel, MS 39443 (toll free) 800.956.3456 | (direct) 601.422.0033 | (fax) 601.422.1652 www.HowardLightingProducts.com