

## DISC LIGHT

### CCT SELECTABLE SERIES



DL6



DL7

#### PRODUCT DESCRIPTION:

The LED Disc Light's versatility as a flush mount fixture and surface downlight saves electrical contractors time, labor and space by making it possible to install custom downlighting without a recessed can. Adding to it, the new generation is wet location rated, CCT selectable (2700K/3000K/4000K/5000K), Title 24 compliant, and ETL listed as both a retrofit kit and a luminaire. The slim-profile Disc Light is available in two sizes, and mounts directly to a 3"/4"/5"/6" housing and standard 4" J-Box. In other words, more options and fewer SKUs to stock on distributor shelves and job sites!

The Disc Light provides exceptional performance in general lighting applications for homes, hotels, motels and commercial properties, and can also serve as a cost-effective temporary lighting solution. The luminaire is the ideal choice for adding energy-efficient and long-lasting downlighting to bathrooms, showers, spas and other indoor wet locations environment.



#### FEATURES:

- E26 screw-base connector included
- Listed as a fixture and a retrofit
- Passes the Lutron Shimmer test. Listing on Lutron Compatibility list is in progress.

#### DIMMING:

- 120V option available with 120V triac dimming (10%)

#### MOUNTING:

- DL6 model fits 3"/4" housing and standard 4" J-Box
- DL7 model fits 3"/4"/5"/6" housing and standard 4" J-Box
- E26 screw-base connector included

#### CONSTRUCTION:

- Durable thermoplastic housing
- Plastic lens

#### LISTINGS:

- ETL listed for Wet Locations, Indoor
- ENERGY STAR Certified
- Supports T24 Part 6 high efficacy lighting requirements

#### WARRANTY:

5-year standard warranty (further details available at [www.maxlite.com/warranties](http://www.maxlite.com/warranties)) Product may be eligible for a warranty extension to 10 years, for an additional fee. Contact MaxLite for details.

### ORDERING STRUCTURE

FAMILY	SIZE	WATTAGE (NOMINAL)	CRI	CCT	FINISH
DL= Disc Light	6= O.D. 5.20"	07= 07W	9= 90	CS= 2700K/3000K/4000K/5000K CCT Selectable	WH= White
	7= O.D. 7.33"	11= 11W			

#### ORDER CODE

ORDER CODE	MODEL NUMBER
103864	DL6079CSWH
103873	DL7119CSWH


#### COMPATIBLE DIMMERS

DIMMER BRAND	MODELS
LUTRON	DVLV-600P, DVELV-303P, DV-600P, MACL-153M, SCL-153P, DVCL-153P, MAELV-600, CTCL-153PDH-WH, TGCL-153PH-WH, DWCL-153PH-WH


## SPECIFICATIONS

	DL6079CSWH	DL7119CSWH
	<b>DETAILS</b>	
Nominal Wattage (W)	7W	11W
Lumens Delivered (lm)	650	1000
Equivalency	40W INC.	75W INC.
Efficacy (lm/W)	97	95
Beam Angle	110°	
CRI	≥90	
Color Temperature (K)	2700K, 3000K, 4000K, 5000K	
L70 Lifetime (Hrs)	≥50,000 Hrs	
Voltage	120V, Triac Dimming, 10%	
Power Factor	≥0.90	
Housing	Thermoplastic	
Lens	Plastic	
Mounting	3"/4" housings, 4"J-box	3"/4" 5"/6" housings, 4"J-box
Operating Temperature	-4°F to 104°F	
Listings	ENERGY STAR, Title 24, Title 20, cETLus, FCC	
Environment	Wet locations, Indoor	
Warranty	5 Years	

## PRODUCT DIMENSIONS:

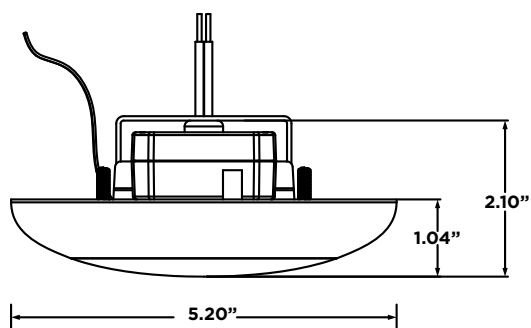

DL6

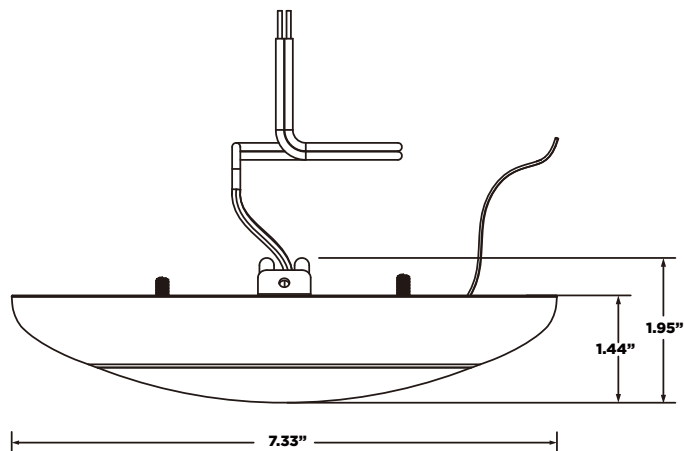

DL7